


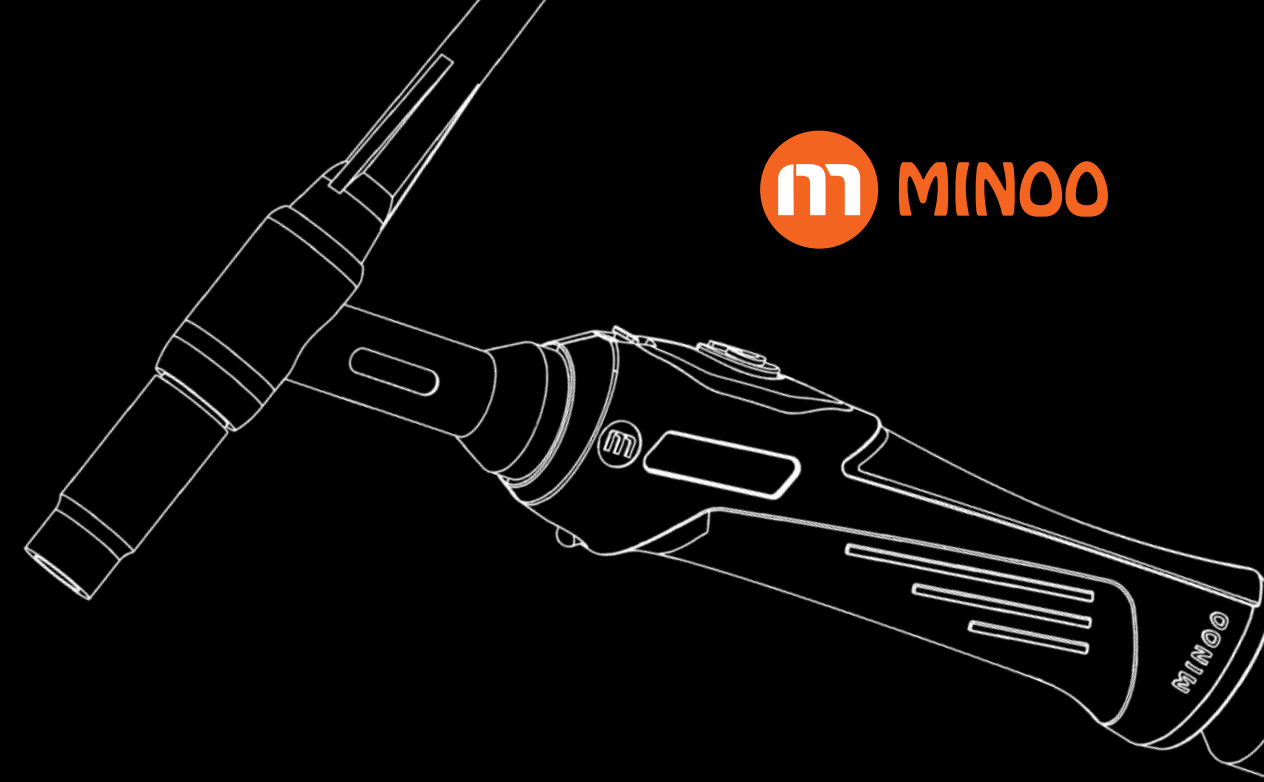

TIG:

9、17、18、20、24、24W、25、26、450W、12

模块化焊枪 Modular Torch:TSA17、20、26

送丝枪 TIG Wire-Feeding Torch:9、17、18、20、26、

氩弧/镭射冷送丝机 TIG COLD WIRE LASER WIRE FEEDER

小枪 MICRO TIG

通用快速转换器 UNIVERSAL QUICK CONVERTOR




气冷 GAS COOLED

DC 35% 直流35%暂载率 Duty35%DC:110 Amp

AC 35% 交流35%暂载率 Duty35%AC:95 Amp

mm 电极尺寸Electrode Size:0.5-1.6 WIRE

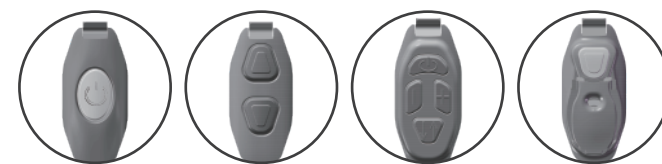


可选配开关 SWITCH
● 单开关 Single
● 双开关 Double
● 四开关 Four
● 电位器 Poti

整枪订购编号

Procurement code

AOT1124-101	4M	焊枪/TIG9/单开关/一体/16平方/仿形手柄/M12*1
AOT1128-101	8M	焊枪/TIG9/单开关/一体/16平方/仿形手柄/M12*1
AOT2124-101	4M	焊枪/TIG9F/单开关/一体/16平方/仿形手柄/M12*1
AOT2128-101	8M	焊枪/TIG9F/单开关/一体/16平方/仿形手柄/M12*1
AOT3124-101	4M	焊枪/TIG9V/单开关/一体/16平方/仿形手柄/M12*1
AOT3128-101	8M	焊枪/TIG9V/单开关/一体/16平方/仿形手柄/M12*1
AOT4124-101	4M	焊枪/TIG9VF/单开关/一体/16平方/仿形手柄/M12*1
AOT4128-101	8M	焊枪/TIG9VF/单开关/一体/16平方/仿形手柄/M12*1

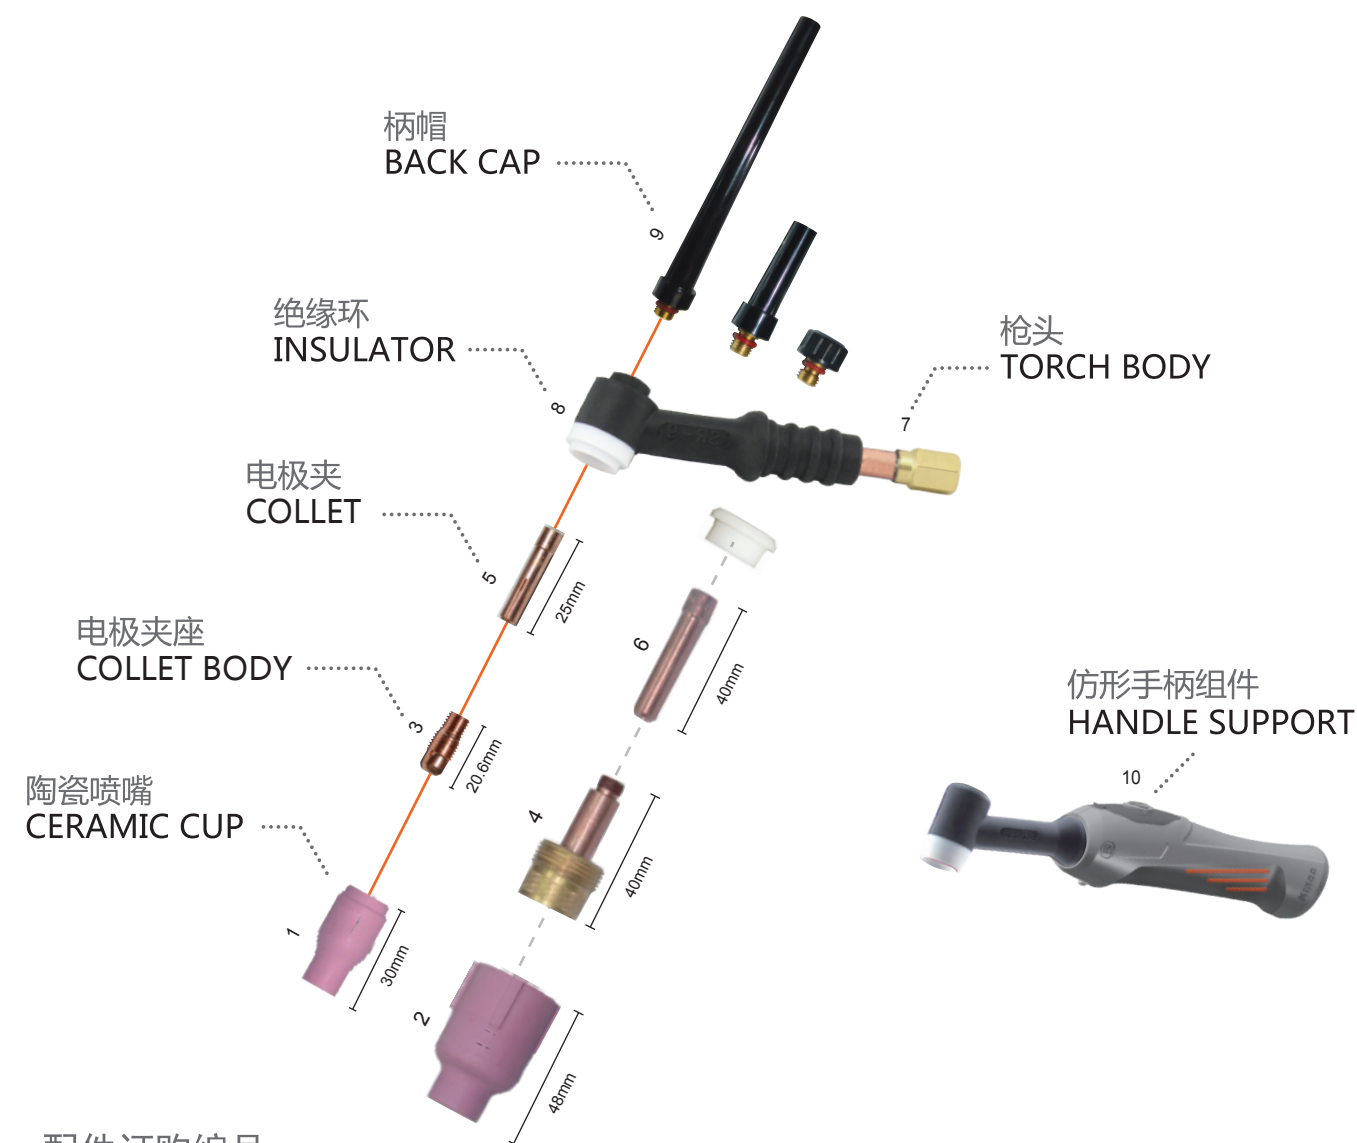

配件订购编号

Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0061	13N12	GR8 Φ12.5mm	● 5.1	MGU0008-05	13N20	Φ0.5mm
1.2	MGS0062	13N13	GR10 Φ16mm	5.2	MGU0008-10	13N21	Φ1.0mm
1.3	MGS0065	13N11	GR7 Φ11mm	5.3	MGU0008-12	701.0254	Φ1.2mm
1.4	MGS0067	13N08	GR4 Φ6.4mm	5.4	MGU0008-16	13N22	Φ1.6mm
● 1.5	MGS0068	13N09	GR5 Φ8mm	5.5	MGU0008-20	70066WT	Φ2.0mm
1.6	MGS0069	13N10	GR6 Φ9.5mm	5.6	MGU0008-24	13N23	Φ2.4mm
1.7	MGS0041	796F71	GR4L Φ6.5mm	5.7	MGU0008-32	13N24	Φ3.2mm
1.8	MGS0042	796F72	GR5L Φ8mm	6.1	MGU0033-05	13N20L	Φ0.5mm
1.9	MGS0043	796F73	GR6L Φ9.5mm	6.2	MGU0033-10	13N21L	Φ1.0mm
1.10	MGS0045	796F70	GR3L Φ4mm	6.3	MGU0033-16	13N22L	Φ1.6mm
2.1	MGS0020	57N75	GR6 Φ9.5mm	6.4	MGU0033-20	13N23L	Φ2.0mm
2.2	MGS0026	57N74	GR8 Φ16mm	6.5	MGU0033-24	13N23ML	Φ2.4mm
2.3	MGS0027	53N88	GR10 Φ12.5mm	6.6	MGU0033-32	13N24L	Φ3.2mm
2.4	MGS0028	53N87	GR12 Φ19.5mm	● 7	MGZ0004	WP-9	
2.5	MGS0029	53N89	GR15 Φ12.5mm	8	MGK0079	53N66	
● 3.1	MGF0008-05	13N25	Φ0.5mm	● 9.1	MHJ0018	Long	
3.2	MGF0008-10	13N26	Φ1.0mm	9.2	MHJ0019	Medium	
3.3	MGF0008-12		Φ1.2mm	9.3	MHJ0015	Short	
3.4	MGF0008-16	13N27	Φ2.0mm	10	AGZ0004-00		
3.5	MGF0008-20	13N27M	Φ2.4mm				
3.6	MGF0008-24	13N28	Φ3.2mm				
3.7	MGF0008-32	13N29	Φ4.0mm				
4.1	MGF0060-10	45V0204S	Φ1.0mm				
4.2	MGF0060-16	45V116S	Φ1.6mm				
4.3	MGF0060-24	45V64S	Φ2.4mm				
4.4	MGF0060-32	995795S	Φ3.2mm				

m TIG 17




气冷 GAS COOLED

DC 35% 直流35%暂载率 Duty35%DC:140 Amp

AC 35% 交流35%暂载率 Duty35%AC:125 Amp

mm 电极尺寸 Electrode Size:0.5-2.4 WIRE

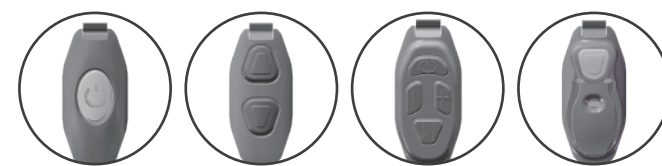


可选配开关 SWITCH
● 单开关 Single
● 双开关 Double
● 四开关 Four
● 电位器 Poti

整枪订购编号

Procurement code

AOZ1124-101	4M	焊枪/TIG17/单开关/一体/16平方/仿形手柄/M12*1
AOZ1128-101	8M	焊枪/TIG17/单开关/一体/16平方/仿形手柄/M12*1
AOZ2124-101	4M	焊枪/TIG17F/单开关/一体/16平方/仿形手柄/M12*1
AOZ2128-101	8M	焊枪/TIG17F/单开关/一体/16平方/仿形手柄/M12*1
AOZ3124-101	4M	焊枪/TIG17V/单开关/一体/16平方/仿形手柄/M12*1
AOZ3128-101	8M	焊枪/TIG17V/单开关/一体/16平方/仿形手柄/M12*1
AOZ4124-101	4M	焊枪/TIG17VF/单开关/一体/16平方/仿形手柄/M12*1
AOZ4128-101	8M	焊枪/TIG17VF/单开关/一体/16平方/仿形手柄/M12*1

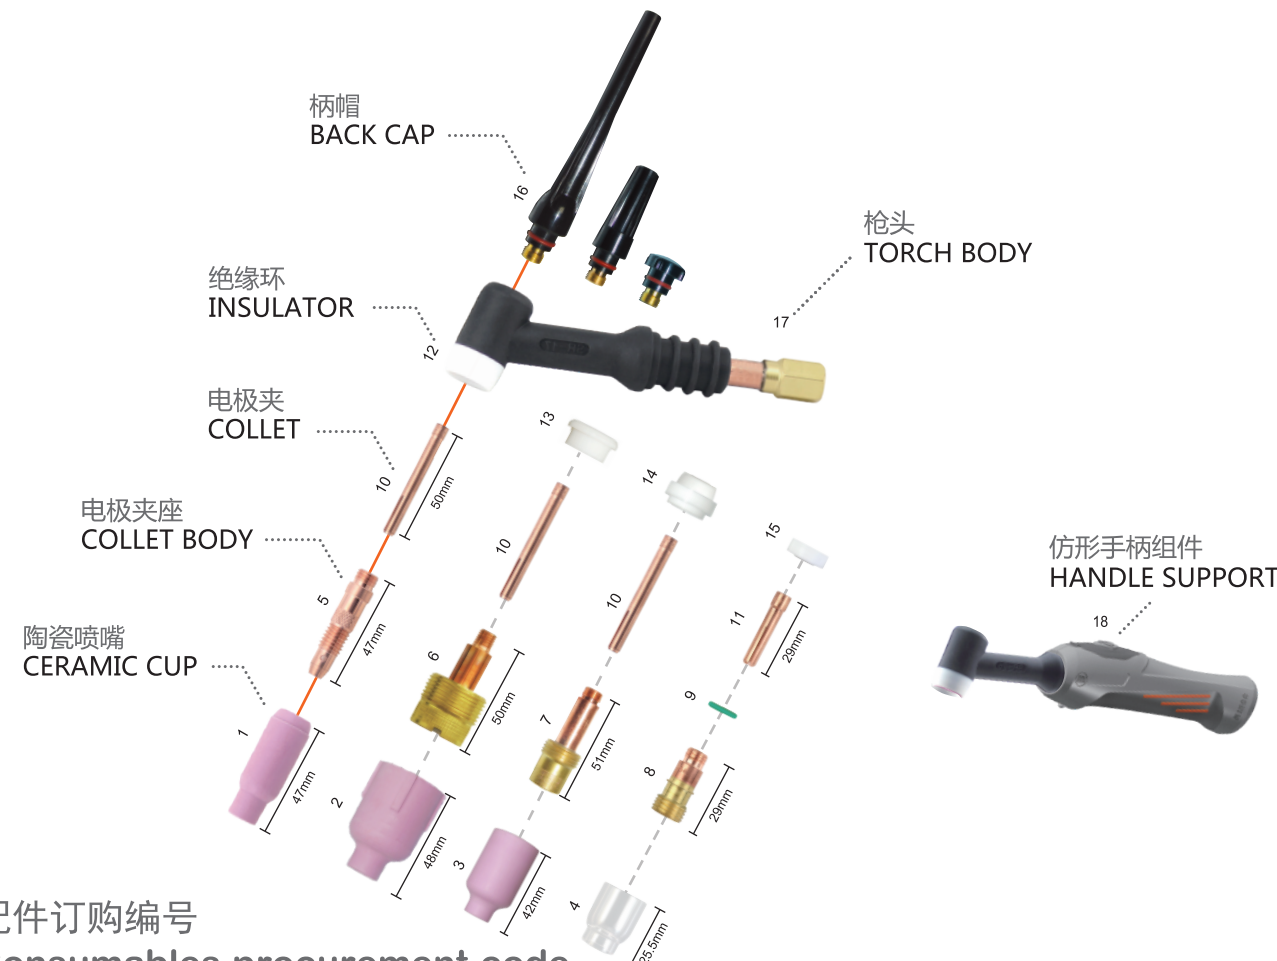

配件订购编号

Consumables procurement code


(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0007	10N50	GR4 Φ6.5mm	7.1	MGF0001-05	45V29	Φ0.5mm
● 1.2	MGS0008	10N49	GR5 Φ8mm	7.2	MGF0001-10	45V24	Φ1.0mm
1.3	MGS0009	10N48	GR6 Φ9.5mm	7.3	MGF0001-16	45V25	Φ1.6mm
1.4	MGS0005	10N47	GR7 Φ11mm	7.4	MGF0001-20	70060WT	Φ2.0mm
1.5	MGS0001	10N46	GR8 Φ12.5mm	7.5	MGF0001-24	45V26	Φ2.4mm
1.6	MGS0002	10N45	GR10 Φ16mm	7.6	MGF0001-32	45V27	Φ3.2mm
1.7	MGS0003	10N44	GR12 Φ19.5mm	7.7	MGF0001-40	45V28	Φ4.0mm
2.1	MGS0020	57N75	GR6 Φ9.5mm	8.1	MGF0086-10	TE0031-10	Φ1.0mm
2.2	MGS0027	53N88	GR10 Φ12.5mm	8.2	MGF0086-16	TE0031-10	Φ1.6mm
2.3	MGS0026	57N74	GR8 Φ16mm	8.3	MGF0086-20	TE0031-10	Φ2.0mm
2.4	MGS0028	53N87	GR12 Φ19.5mm	8.4	MGF0086-24	TE0031-10	Φ2.4mm
3.1	MGS0086	54N18	GR4 Φ6.5mm	8.5	MGF0086-32	TE0031-10	Φ3.2mm
3.2	MGS0087	54N17	GR5 Φ8mm	8.6	MGF0086-40	TE0031-10	Φ4.0mm
3.3	MGS0088	54N16	GR6 Φ9.5mm	9	MFT8528	EA3573	
3.4	MGS0089	54N15	GR7 Φ11mm	10.1	MGU0006-05	10N21	Φ0.5mm
3.5	MGS0085	54N14	GR8 Φ12.5mm	10.2	MGU0006-10	10N22	Φ1.0mm
3.6	MGS0082	54N19	GR12 Φ19.5mm	● 10.3	MGU0006-16	10N23	Φ1.6mm
4.1	MGS0720	TC0270	GR6 Φ6mm	10.4	MGU0006-20	10N23M	Φ2.0mm
4.2	MGS0721	TC0271	GR8 Φ8mm	10.5	MGU0006-24	10N24	Φ2.4mm
4.3	MGS0722	TC0272	GR10 Φ10mm	10.6	MGU0006-32	10N25	Φ3.2mm
4.4	MGS0723	TC0273	GR11 Φ11mm	10.7	MGU0006-40	54N20	Φ4.0mm
4.5	MGS0724	TC0274	GR13 Φ13mm	11.1	MGU0007-05	10N21S	Φ0.5mm
4.6	MGS0726	TC0276	GR14.8 Φ14.6mm	11.2	MGU0007-10	10N22S	Φ1.0mm
4.7	MGS0725	TC0275	GR20 Φ15.3mm	11.3	MGU0007-16	10N23S	Φ1.6mm
5.1	MGF0006-05	10N29	Φ0.5mm	11.4	MGU0007-20	10N23MS	Φ2.0mm
5.2	MGF0006-10	10N30	Φ1.0mm	11.5	MGU0007-24	10N24S	Φ2.4mm
● 5.3	MGF0006-16	10N31	Φ1.6mm	11.6	MGU0007-32	10N25S	Φ3.2mm
5.4	MGF0006-20	70064WT	Φ2.0mm	● 12	MGK0007	18CG	
5.5	MGF0006-24	10N32	Φ2.4mm	13	MGK0005	54N63	
5.6	MGF0006-32	10N28	Φ3.2mm	14	MGK0008	54N01	
5.7	MGF0006-40	406488	Φ4.0mm	15	MGK0062	TQ0017	
5.8	MGF0006-48	30126	Φ4.8mm	● 16.1	MHJ0011	57Y02	Long
6.1	MGF0002-10	45V0204	Φ1.0mm	16.2	MHJ0051	57Y03	Medium
6.2	MGF0002-16	45V116	Φ1.6mm	16.3	MHJ0012	57Y04	Short
6.3	MGF0002-24	45V64	Φ2.4mm	● 17	MGZ0062	WP-17	
6.4	MGF0002-32	995795	Φ3.2mm	18	AGZ0062-00		
6.5	MGF0002-40	45V63	Φ4.0mm				

m TIG 18




水冷 WATER COOLED
 直流100%暂载率 Duty100%DC:320 Amp
 交流100%暂载率 Duty100%AC:240 Amp
 电极尺寸Electrode Size:0.5-4.0 WIRE

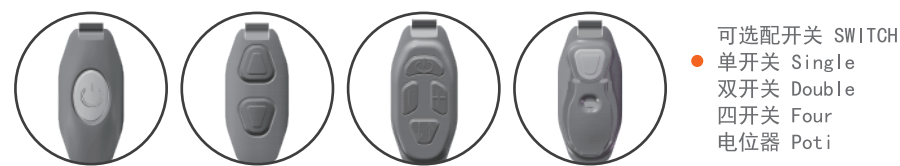

整枪订购编号 Procurement code

AOB1124-101	4M	焊枪/TIG18/单开关/8平方/仿形手柄/M12*1
AOB1128-101	8M	焊枪/TIG18/单开关/8平方/仿形手柄/M12*1
AOB2124-101	4M	焊枪/TIG18F/单开关/8平方/仿形手柄/M12*1
AOB2128-101	8M	焊枪/TIG18F/单开关/8平方/仿形手柄/M12*1
AOB3124-101	4M	焊枪/TIG18V/单开关/8平方/仿形手柄/M12*1
AOB3128-101	8M	焊枪/TIG18V/单开关/8平方/仿形手柄/M12*1
AOB4124-101	4M	焊枪/TIG18VF/单开关/8平方/仿形手柄/M12*1
AOB4128-101	8M	焊枪/TIG18VF/单开关/8平方/仿形手柄/M12*1

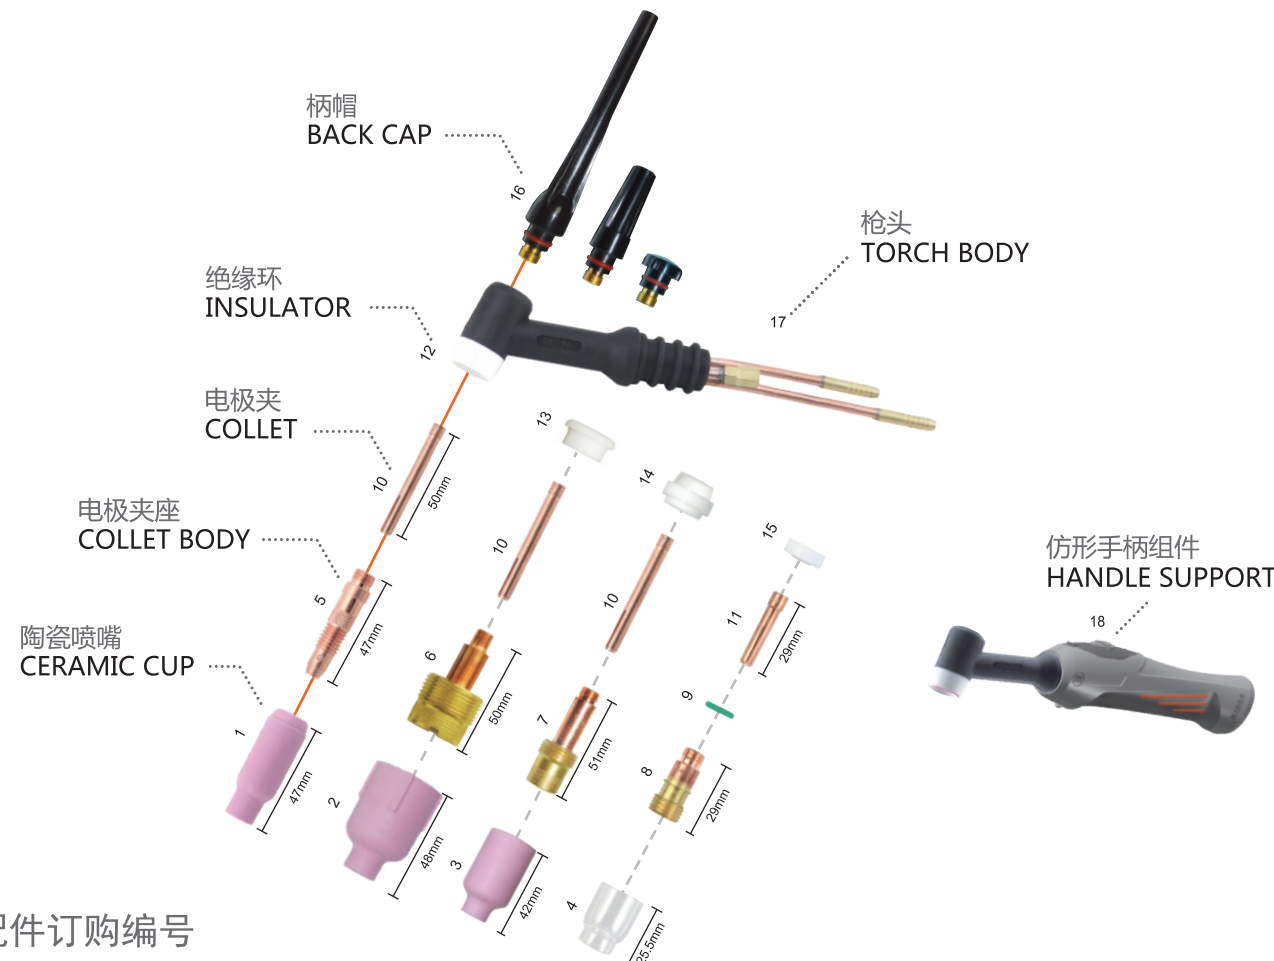

配件订购编号 Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0007	10N50 GR4	Φ6.5mm	7.1	MGF0001-05	45V29	Φ0.5mm
● 1.2	MGS0008	10N49 GR5	Φ8mm	7.2	MGF0001-10	45V24	Φ1.0mm
1.3	MGS0009	10N48 GR6	Φ9.5mm	7.3	MGF0001-16	45V25	Φ1.6mm
1.4	MGS0005	10N47 GR7	Φ11mm	7.4	MGF0001-20	70060WT	Φ2.0mm
1.5	MGS0001	10N46 GR8	Φ12.5mm	7.5	MGF0001-24	45V26	Φ2.4mm
1.6	MGS0002	10N45 GR10	Φ16mm	7.6	MGF0001-32	45V27	Φ3.2mm
1.7	MGS0003	10N44 GR12	Φ19.5mm	7.7	MGF0001-40	45V28	Φ4.0mm
2.1	MGS0020	57N75 GR6	Φ9.5mm	8.1	MGF0086-10	TE0031-10	Φ1.0mm
2.2	MGS0027	53N88 GR10	Φ12.5mm	8.2	MGF0086-16	TE0031-10	Φ1.6mm
2.3	MGS0026	57N74 GR8	Φ16mm	8.3	MGF0086-20	TE0031-10	Φ2.0mm
2.4	MGS0028	53N87 GR12	Φ19.5mm	8.4	MGF0086-24	TE0031-10	Φ2.4mm
3.1	MGS0086	54N18 GR4	Φ6.5mm	8.5	MGF0086-32	TE0031-10	Φ3.2mm
3.2	MGS0087	54N17 GR5	Φ8mm	8.6	MGF0086-40	TE0031-10	Φ4.0mm
3.3	MGS0088	54N16 GR6	Φ9.5mm	9	MFT8528	EA3573	
3.4	MGS0089	54N15 GR7	Φ11mm	10.1	MGU0006-05	10N21	Φ0.5mm
3.5	MGS0085	54N14 GR8	Φ12.5mm	10.2	MGU0006-10	10N22	Φ1.0mm
3.6	MGS0082	54N19 GR12	Φ19.5mm	● 10.3	MGU0006-16	10N23	Φ1.6mm
4.1	MGS0720	TC0270 GR6	Φ6mm	10.4	MGU0006-20	10N23M	Φ2.0mm
4.2	MGS0721	TC0271 GR8	Φ8mm	10.5	MGU0006-24	10N24	Φ2.4mm
4.3	MGS0722	TC0272 GR10	Φ10mm	10.6	MGU0006-32	10N25	Φ3.2mm
4.4	MGS0723	TC0273 GR11	Φ11mm	10.7	MGU0006-40	54N20	Φ4.0mm
4.5	MGS0724	TC0274 GR13	Φ13mm	11.1	MGU0007-05	10N21S	Φ0.5mm
4.6	MGS0726	TC0276 GR14.8	Φ14.6mm	11.2	MGU0007-10	10N22S	Φ1.0mm
4.7	MGS0725	TC0275 GR20	Φ15.3mm	11.3	MGU0007-16	10N23S	Φ1.6mm
5.1	MGF0006-05	10N29	Φ0.5mm	11.4	MGU0007-20	10N23MS	Φ2.0mm
5.2	MGF0006-10	10N30	Φ1.0mm	11.5	MGU0007-24	10N24S	Φ2.4mm
● 5.3	MGF0006-16	10N31	Φ1.6mm	11.6	MGU0007-32	10N25S	Φ3.2mm
5.4	MGF0006-20	70064WT	Φ2.0mm	● 12	MGK0007	18CG	
5.5	MGF0006-24	10N32	Φ2.4mm	13	MGK0005	54N63	
5.6	MGF0006-32	10N28	Φ3.2mm	14	MGK0008	54N01	
5.7	MGF0006-40	406488	Φ4.0mm	15	MGK0062	TQ0017	
5.8	MGF0006-48	30126	Φ4.8mm	● 16.1	MHJ0011	57Y02	Long
6.1	MGF0002-10	45V0204	Φ1.0mm	16.2	MHJ0051	57Y03	Medium
6.2	MGF0002-16	45V116	Φ1.6mm	16.3	MHJ0012	57Y04	Short
6.3	MGF0002-24	45V64	Φ2.4mm	● 17	MGI0063	WP-18	
6.4	MGF0002-32	995795	Φ3.2mm	18	AGZ0063-00		
6.5	MGF0002-40	45V63	Φ4.0mm				

m TIG 26




气冷 GAS COOLED

DC 35% 直流35%暂载率 Duty35%DC:180 Amp

AC 35% 交流35%暂载率 Duty35%AC:150 Amp

mm 电极尺寸Electrode Size:0.5-4.0 WIRE

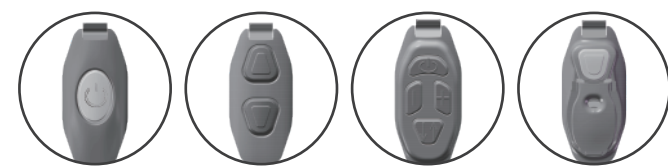

可选配开关 SWITCH
● 单开关 Single
● 双开关 Double
● 四开关 Four
● 电位器 Poti


整枪订购编号

Procurement code

AOW1124-101	4M	焊枪/TIG26/单开关/一体/25平方/仿形手柄/M12*1
AOW1128-101	8M	焊枪/TIG26/单开关/一体/25平方/仿形手柄/M12*1
AOW2124-101	4M	焊枪/TIG26F/单开关/一体/25平方/仿形手柄/M12*1
AOW2128-101	8M	焊枪/TIG26F/单开关/一体/25平方/仿形手柄/M12*1
AOW3124-101	4M	焊枪/TIG26V/单开关/一体/25平方/仿形手柄/M12*1
AOW3128-101	8M	焊枪/TIG26V/单开关/一体/25平方/仿形手柄/M12*1
AOW4124-101	4M	焊枪/TIG26VF/单开关/一体/25平方/仿形手柄/M12*1
AOW4128-101	8M	焊枪/TIG26VF/单开关/一体/25平方/仿形手柄/M12*1



MADE IN CHINA

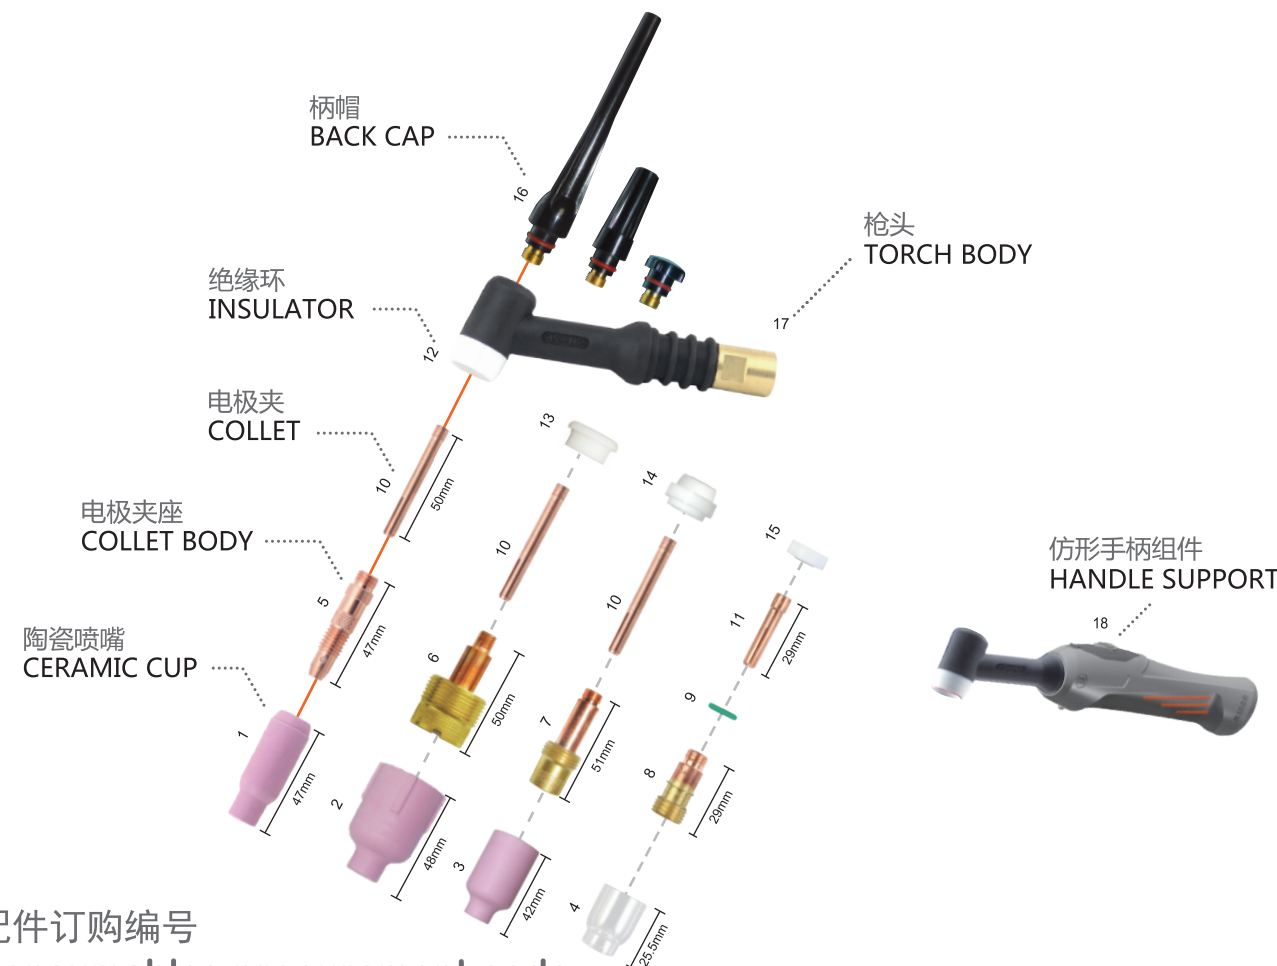

配件订购编号

Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0007	10N50	GR4 Φ6.5mm	7.1	MGF0001-05	45V29	Φ0.5mm
● 1.2	MGS0008	10N49	GR5 Φ8mm	7.2	MGF0001-10	45V24	Φ1.0mm
1.3	MGS0009	10N48	GR6 Φ9.5mm	7.3	MGF0001-16	45V25	Φ1.6mm
1.4	MGS0005	10N47	GR7 Φ11mm	7.4	MGF0001-20	70060WT	Φ2.0mm
1.5	MGS0001	10N46	GR8 Φ12.5mm	7.5	MGF0001-24	45V26	Φ2.4mm
1.6	MGS0002	10N45	GR10 Φ16mm	7.6	MGF0001-32	45V27	Φ3.2mm
1.7	MGS0003	10N44	GR12 Φ19.5mm	7.7	MGF0001-40	45V28	Φ4.0mm
2.1	MGS0020	57N75	GR6 Φ9.5mm	8.1	MGF0086-10	TE0031-10	Φ1.0mm
2.2	MGS0027	53N88	GR10 Φ12.5mm	8.2	MGF0086-16	TE0031-10	Φ1.6mm
2.3	MGS0026	57N74	GR8 Φ16mm	8.3	MGF0086-20	TE0031-10	Φ2.0mm
2.4	MGS0028	53N87	GR12 Φ19.5mm	8.4	MGF0086-24	TE0031-10	Φ2.4mm
3.1	MGS0086	54N18	GR4 Φ6.5mm	8.5	MGF0086-32	TE0031-10	Φ3.2mm
3.2	MGS0087	54N17	GR5 Φ8mm	8.6	MGF0086-40	TE0031-10	Φ4.0mm
3.3	MGS0088	54N16	GR6 Φ9.5mm	9	MFT8528	EA3573	
3.4	MGS0089	54N15	GR7 Φ11mm	10.1	MGU0006-05	10N21	Φ0.5mm
3.5	MGS0085	54N14	GR8 Φ12.5mm	10.2	MGU0006-10	10N22	Φ1.0mm
3.6	MGS0082	54N19	GR12 Φ19.5mm	● 10.3	MGU0006-16	10N23	Φ1.6mm
4.1	MGS0720	TC0270	GR6 Φ6mm	10.4	MGU0006-20	10N23M	Φ2.0mm
4.2	MGS0721	TC0271	GR8 Φ8mm	10.5	MGU0006-24	10N24	Φ2.4mm
4.3	MGS0722	TC0272	GR10 Φ10mm	10.6	MGU0006-32	10N25	Φ3.2mm
4.4	MGS0723	TC0273	GR11 Φ11mm	10.7	MGU0006-40	54N20	Φ4.0mm
4.5	MGS0724	TC0274	GR13 Φ13mm	11.1	MGU0007-05	10N21S	Φ0.5mm
4.6	MGS0726	TC0276	GR14.8 Φ14.6mm	11.2	MGU0007-10	10N22S	Φ1.0mm
4.7	MGS0725	TC0275	GR20 Φ15.3mm	11.3	MGU0007-16	10N23S	Φ1.6mm
5.1	MGF0006-05	10N29	Φ0.5mm	11.4	MGU0007-20	10N23MS	Φ2.0mm
5.2	MGF0006-10	10N30	Φ1.0mm	11.5	MGU0007-24	10N24S	Φ2.4mm
● 5.3	MGF0006-16	10N31	Φ1.6mm	11.6	MGU0007-32	10N25S	Φ3.2mm
5.4	MGF0006-20	70064WT	Φ2.0mm	● 12	MGK0007	18CG	
5.5	MGF0006-24	10N32	Φ2.4mm	13	MGK0005	54N63	
5.6	MGF0006-32	10N28	Φ3.2mm	14	MGK0008	54N01	
5.7	MGF0006-40	406488	Φ4.0mm	15	MGK0062	TQ0017	
5.8	MGF0006-48	30126	Φ4.8mm	● 16.1	MHJ0011	57Y02	Long
6.1	MGF0002-10	45V0204	Φ1.0mm	16.2	MHJ0051	57Y03	Medium
6.2	MGF0002-16	45V116	Φ1.6mm	16.3	MHJ0012	57Y04	Short
6.3	MGF0002-24	45V64	Φ2.4mm	● 17	MGZ0071	WP-26	
6.4	MGF0002-32	995795	Φ3.2mm	18	AGZ0071-00		
6.5	MGF0002-40	45V63	Φ4.0mm				

TIG 26

TIG 26

m TIG 20




水冷 WATER COOLED
 直流100%暂载率 Duty100%DC:250 Amp
 交流100%暂载率 Duty100%AC:220 Amp
 电极尺寸Electrode Size:0.5-3.2 WIRE



整枪订购编号 Procurement code

AOM1124-101	4M	焊枪/TIG20/单开关/4平方/仿形手柄/M12*1
AOM1128-101	8M	焊枪/TIG20/单开关/4平方/仿形手柄/M12*1
AOM2124-101	4M	焊枪/TIG20F/单开关/4平方/仿形手柄/M12*1
AOM2128-101	8M	焊枪/TIG20F/单开关/4平方/仿形手柄/M12*1
AOM3124-101	4M	焊枪/TIG20V/单开关/4平方/仿形手柄/M12*1
AOM3128-101	8M	焊枪/TIG20V/单开关/4平方/仿形手柄/M12*1
AOM4124-101	4M	焊枪/TIG20VF/单开关/4平方/仿形手柄/M12*1
AOM4128-101	8M	焊枪/TIG20VF/单开关/4平方/仿形手柄/M12*1

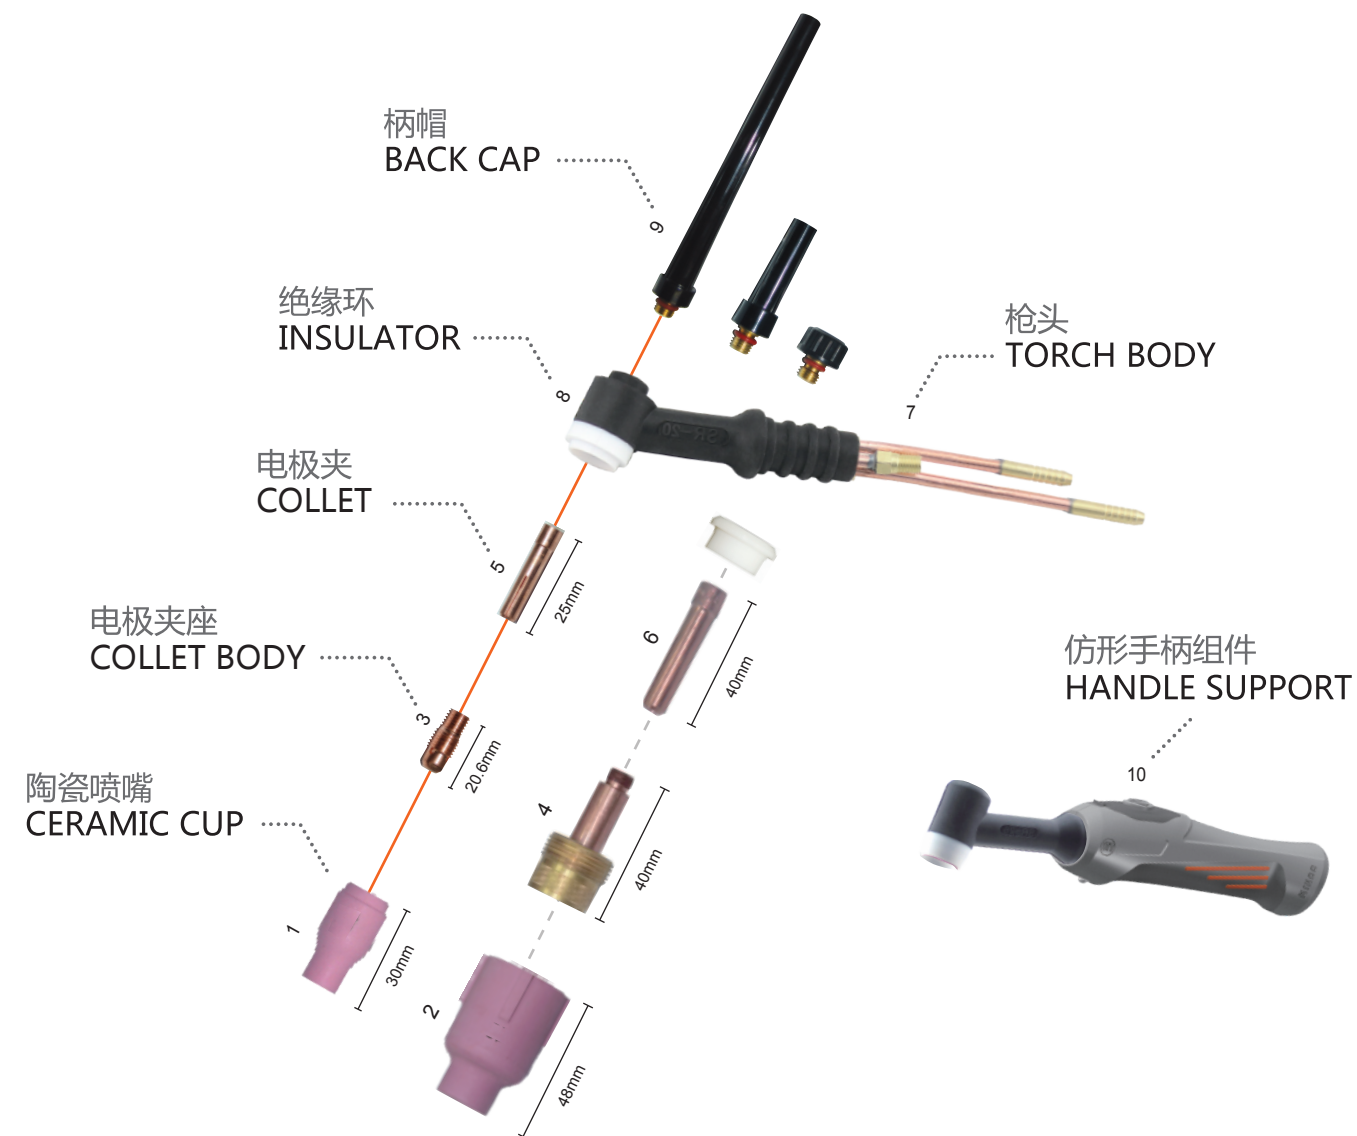

配件订购编号

Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)


Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0061	13N12	GR8 Φ12.5mm	● 5.1	MGU0008-05	13N20	Φ0.5mm
1.2	MGS0062	13N13	GR10 Φ16mm	5.2	MGU0008-10	13N21	Φ1.0mm
1.3	MGS0065	13N11	GR7 Φ11mm	5.3	MGU0008-12	701.0254	Φ1.2mm
1.4	MGS0067	13N08	GR4 Φ6.4mm	5.4	MGU0008-16	13N22	Φ1.6mm
● 1.5	MGS0068	13N09	GR5 Φ8mm	5.5	MGU0008-20	70066WT	Φ2.0mm
1.6	MGS0069	13N10	GR6 Φ9.5mm	5.6	MGU0008-24	13N23	Φ2.4mm
1.7	MGS0041	796F71	GR4L Φ6.5mm	5.7	MGU0008-32	13N24	Φ3.2mm
1.8	MGS0042	796F72	GR5L Φ8mm	6.1	MGU0033-05	13N20L	Φ0.5mm
1.9	MGS0043	796F73	GR6L Φ9.5mm	6.2	MGU0033-10	13N21L	Φ1.0mm
1.10	MGS0045	796F70	GR3L Φ4mm	6.3	MGU0033-16	13N22L	Φ1.6mm
2.1	MGS0020	57N75	GR6 Φ9.5mm	6.4	MGU0033-20	13N23L	Φ2.0mm
2.2	MGS0026	57N74	GR8 Φ16mm	6.5	MGU0033-24	13N23ML	Φ2.4mm
2.3	MGS0027	53N88	GR10 Φ12.5mm	6.6	MGU0033-32	13N24L	Φ3.2mm
2.4	MGS0028	53N87	GR12 Φ19.5mm	● 7	MGI0070	WP-20	
2.5	MGS0029	53N89	GR15 Φ12.5mm	8	MGK0079	53N66	
● 3.1	MGF0008-05	13N25	Φ0.5mm	● 9.1	MHJ0018	Long	
3.2	MGF0008-10	13N26	Φ1.0mm	9.2	MHJ0019	Medium	
3.3	MGF0008-12		Φ1.2mm	9.3	MHJ0015	Short	
3.4	MGF0008-16	13N27	Φ2.0mm	10	AGI0070-00		
3.5	MGF0008-20	13N27M	Φ2.4mm				
3.6	MGF0008-24	13N28	Φ3.2mm				
3.7	MGF0008-32	13N29	Φ4.0mm				
4.1	MGF0060-10	45V0204S	Φ1.0mm				
4.2	MGF0060-16	45V116S	Φ1.6mm				
4.3	MGF0060-24	45V64S	Φ2.4mm				
4.4	MGF0060-32	995795S	Φ3.2mm				



MADE IN CHINA




水冷 WATER COOLED
DC 100% 直流100%暂载率 Duty100%DC:250 Amp
AC 100% 交流100%暂载率 Duty100%AC:220 Amp
mm 电极尺寸Electrode Size:0.5-3.2 WIRE

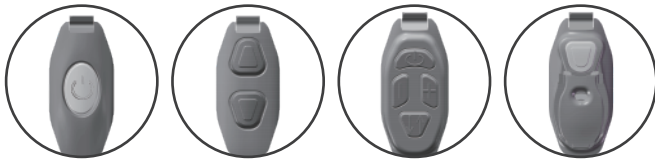

可选配开关 SWITCH
● 单开关 Single
● 双开关 Double
● 四开关 Four
● 电位器 Poti

整枪订购编号
Procurement code

AOJ1124-101 4M 焊枪/TIG25/单开关/4平方/仿形手柄/M12*1
AOJ1128-101 8M 焊枪/TIG25/单开关/4平方/仿形手柄/M12*1

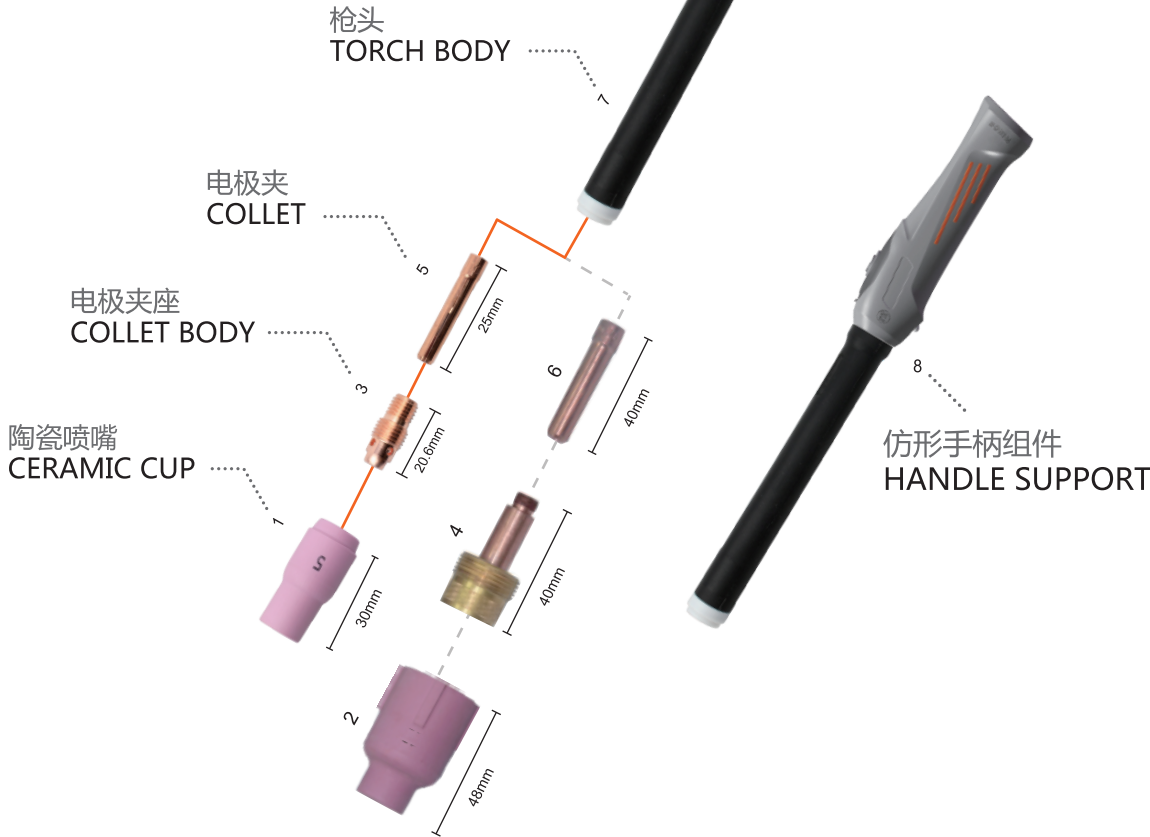

配件订购编号
Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0061	13N12	GR8 Φ12.5mm	4.1	MGF0005-05	45V41	Φ0.5mm
1.2	MGS0062	13N13	GR10 Φ16mm	4.2	MGF0005-10	45V42	Φ1.0mm
1.3	MGS0065	13N11	GR7 Φ11mm	4.3	MGF0005-16	45V43	Φ1.6mm
1.4	MGS0067	13N08	GR4 Φ6.4mm	4.4	MGF0005-20	70058	Φ2.0mm
● 1.5	MGS0068	13N09	GR5 Φ8mm	4.5	MGF0005-24	45V44	Φ2.4mm
1.6	MGS0069	13N10	GR6 Φ9.5mm	4.6	MGF0005-32	45V45	Φ3.2mm
1.7	MGS0041	796F71	GR4L Φ6.5mm	● 5.1	MGU0008-05	13N20	Φ0.5mm
1.8	MGS0042	796F72	GR5L Φ8mm	5.2	MGU0008-10	13N21	Φ1.0mm
1.9	MGS0043	796F73	GR6L Φ9.5mm	5.3	MGU0008-12	701.0254	Φ1.2mm
1.10	MGS0045	796F70	GR3L Φ4mm	5.4	MGU0008-16	13N22	Φ1.6mm
2.1	MGS0020	57N75	GR6 Φ9.5mm	5.5	MGU0008-20	70066WT	Φ2.0mm
2.2	MGS0026	57N74	GR8 Φ16mm	5.6	MGU0008-24	13N23	Φ2.4mm
2.3	MGS0027	53N88	GR10 Φ12.5mm	5.7	MGU0008-32	13N24	Φ3.2mm
2.4	MGS0028	53N87	GR12 Φ19.5mm	6.1	MGU0005-05	53N62	Φ0.5mm
2.5	MGS0029	53N89	GR15 Φ24mm	6.2	MGU0005-10	53N63	Φ1.0mm
● 3.1	MGF0008-05	13N25	Φ0.5mm	6.3	MGU0005-16	53N64	Φ1.6mm
3.2	MGF0008-10	13N26	Φ1.0mm	6.4	MGU0005-24	24GLC332	Φ2.4mm
3.3	MGF0008-12	701.0276	Φ1.2mm	● 7	MGI0075	WP-25	
3.4	MGF0008-16	13N27	Φ1.6mm	● 8	AGI0075-00		
3.5	MGF0008-20	13N27M	Φ2.0mm				
3.6	MGF0008-24	13N28	Φ2.4mm				
3.7	MGF0008-32	13N29	Φ3.2mm				




气冷 GAS COOLED
 DC 35% 直流35%暂载率 Duty35%DC:110 Amp
 AC 35% 交流35%暂载率 Duty35%AC:95 Amp
 电极尺寸 Electrode Size: 0.5-2.4 WIRE



可选配开关 SWITCH
 单开关 Single
 双开关 Double
 四开关 Four
 电位器 Poti

整枪订购编号 Procurement code

AOK1124-101	4M	焊枪/TIG24/单开关/一体/8平方/仿形手柄/M12*1
AOK1128-101	8M	焊枪/TIG24/单开关/一体/8平方/仿形手柄/M12*1
AOK2124-101	4M	焊枪/TIG24F/单开关/一体/8平方/仿形手柄/M12*1
AOK2128-101	8M	焊枪/TIG24F/单开关/一体/8平方/仿形手柄/M12*1

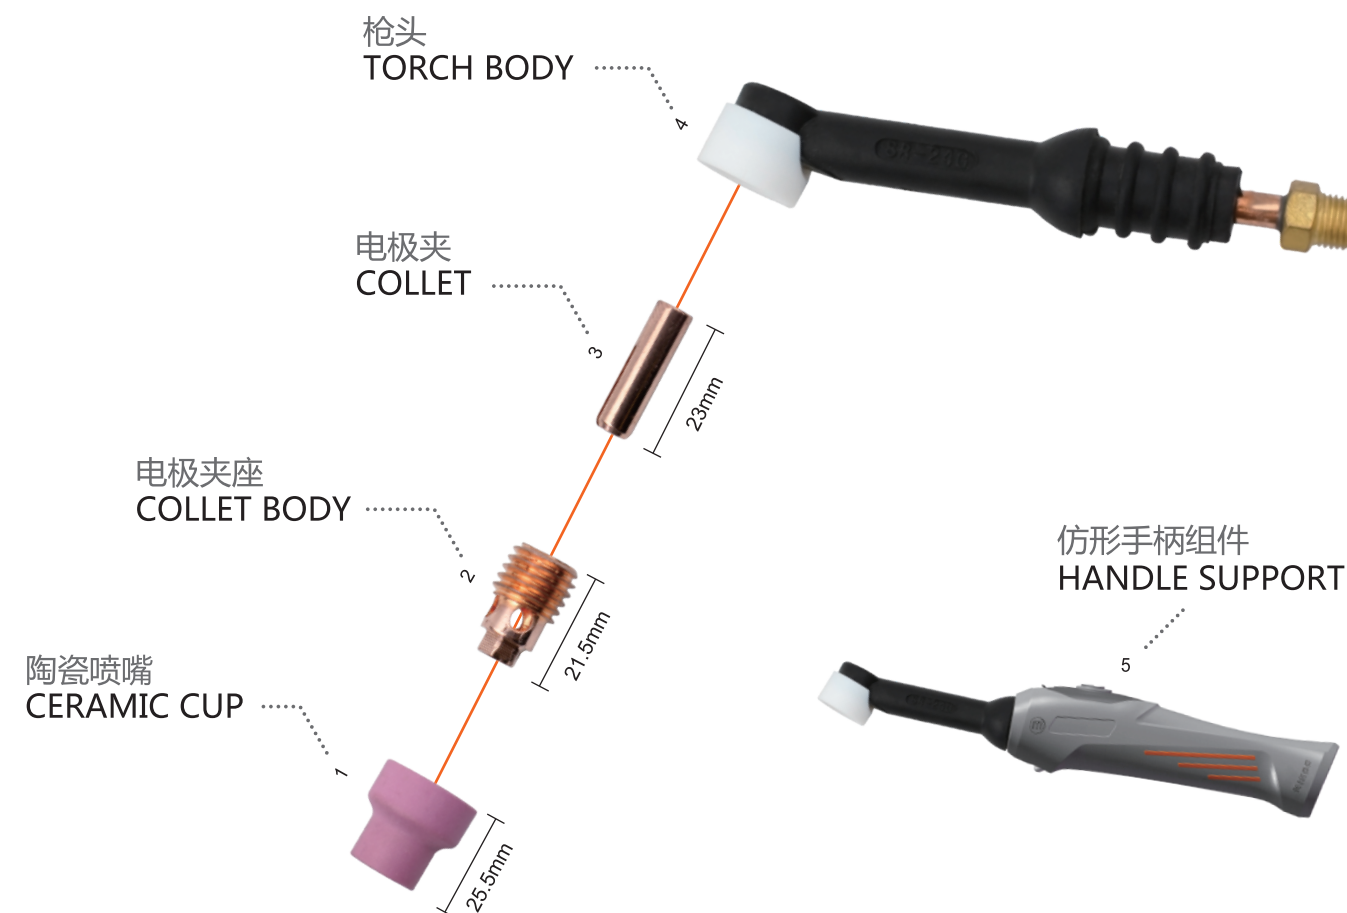

配件订购编号 Consumables procurement code


(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description
● 1.1	MGS0095	53N61S GR8	Φ12.5mm
1.2	MGS0096	53N58 GR4	Φ6.5mm
1.3	MGS0097	53N59 GR5	Φ8mm
1.4	MGS0098	53N60 GR6	Φ9.5mm
1.5	MGS0099	53N61 GR7	Φ11mm
● 2.1	MGF0009-05	53N17	Φ0.5mm
2.2	MGF0009-10	53N18	Φ1.0mm
2.3	MGF0009-16	53N19	Φ1.6mm
2.4	MGF0009-24	24CB332	Φ2.4mm
● 3.1	MGU0009-05	53N15	Φ0.5mm
3.2	MGU0009-10	53N16	Φ1.0mm
3.3	MGU0009-16	53N14	Φ1.6mm
3.4	MGU0009-24	24C332	Φ2.4mm
● 4	MGZ0079	WP-24	
● 5	AGZ0079-00		

m TIG 24W




水冷 WATER COOLED
 直流100%暂载率 Duty100%DC:180 Amp
 交流100%暂载率 Duty100%AC:120 Amp
 电极尺寸Electrode Size:0.5-2.4 WIRE

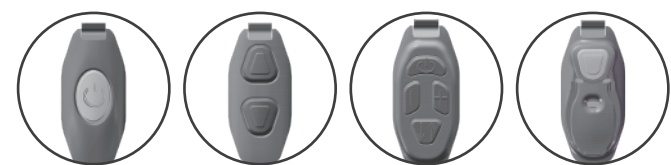

可选配开关 SWITCH
 ● 单开关 Single
 双开关 Double
 四开关 Four
 电位器 Poti

整枪订购编号 Procurement code

AOA1124-101	4M	焊枪/TIG24W/单开关/4平方/仿形手柄/M12*1
AOA1128-101	8M	焊枪/TIG24W/单开关/4平方/仿形手柄/M12*1
AOA2124-101	4M	焊枪/TIG24W F/单开关/4平方/仿形手柄/M12*1
AOA2128-101	8M	焊枪/TIG24W F/单开关/4平方/仿形手柄/M12*1

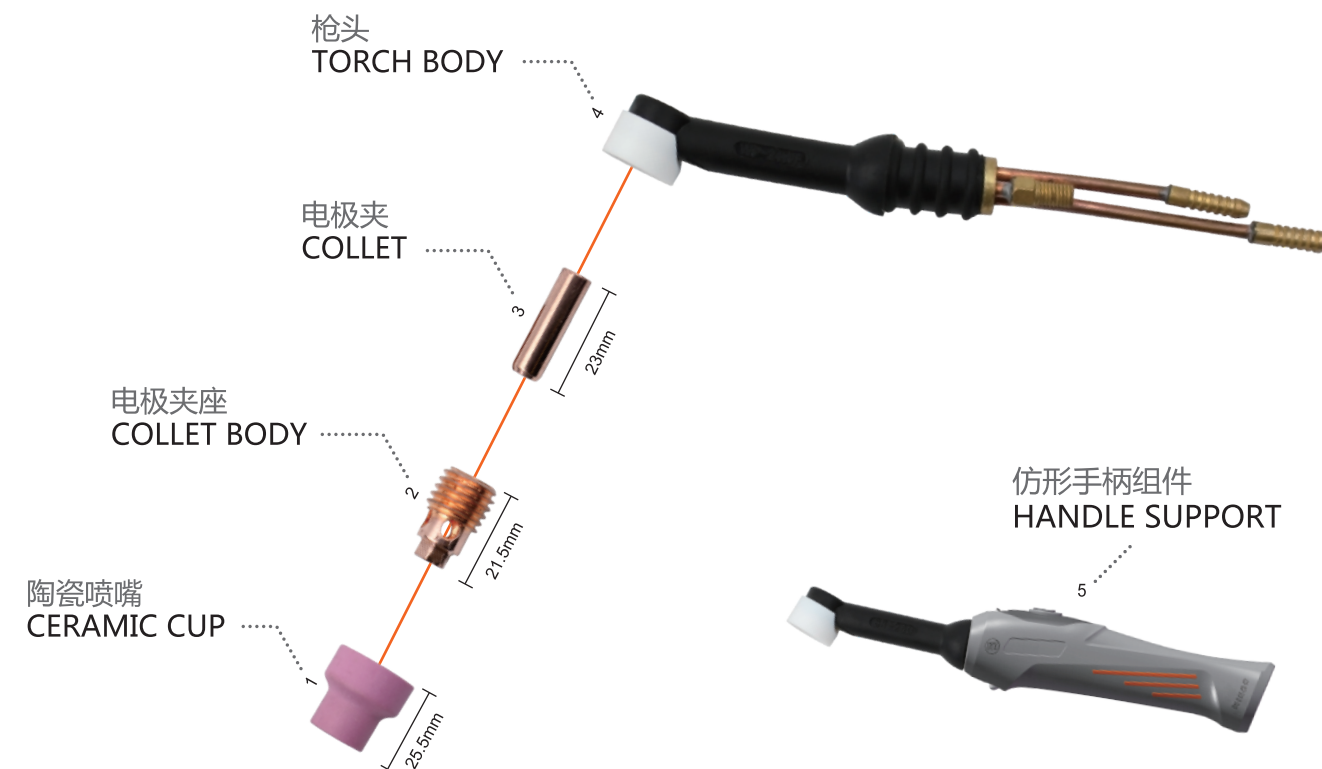

配件订购编号 Consumables procurement code


(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description
● 1.1	MGS0095	53N61S GR8	Φ12.5mm
1.2	MGS0096	53N58 GR4	Φ6.5mm
1.3	MGS0097	53N59 GR5	Φ8mm
1.4	MGS0098	53N60 GR6	Φ9.5mm
1.5	MGS0099	53N61 GR7	Φ11mm
● 2.1	MGF0009-05	53N17	Φ0.5mm
2.2	MGF0009-10	53N18	Φ1.0mm
2.3	MGF0009-16	53N19	Φ1.6mm
2.4	MGF0009-24	24CB332	Φ2.4mm
● 3.1	MGU0009-05	53N15	Φ0.5mm
3.2	MGU0009-10	53N16	Φ1.0mm
3.3	MGU0009-16	53N14	Φ1.6mm
3.4	MGU0009-24	24C332	Φ2.4mm
● 4	MGI0079	WP-24W	
● 5	AGZ0079-00		

m TIG 450W




水冷 WATER COOLED
DC 100% 直流100%暂载率 Duty100%DC:400 Amp
AC 100% 交流100%暂载率 Duty100%AC:280 Amp
mm 电极尺寸Electrode Size:0.5-3.2 WIRE

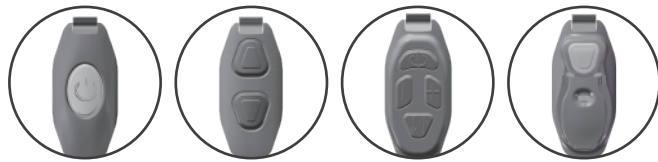

可选配开关 SWITCH
● 单开关 Single
● 双开关 Double
● 四开关 Four
● 电位器 Poti

整枪订购编号
Procurement code

ABT1174-101 4M 焊枪/TIG450W/单开关/6平方/仿形手柄/M12*1
ABT1178-101 8M 焊枪/TIG450W/单开关/6平方/仿形手柄/M12*1

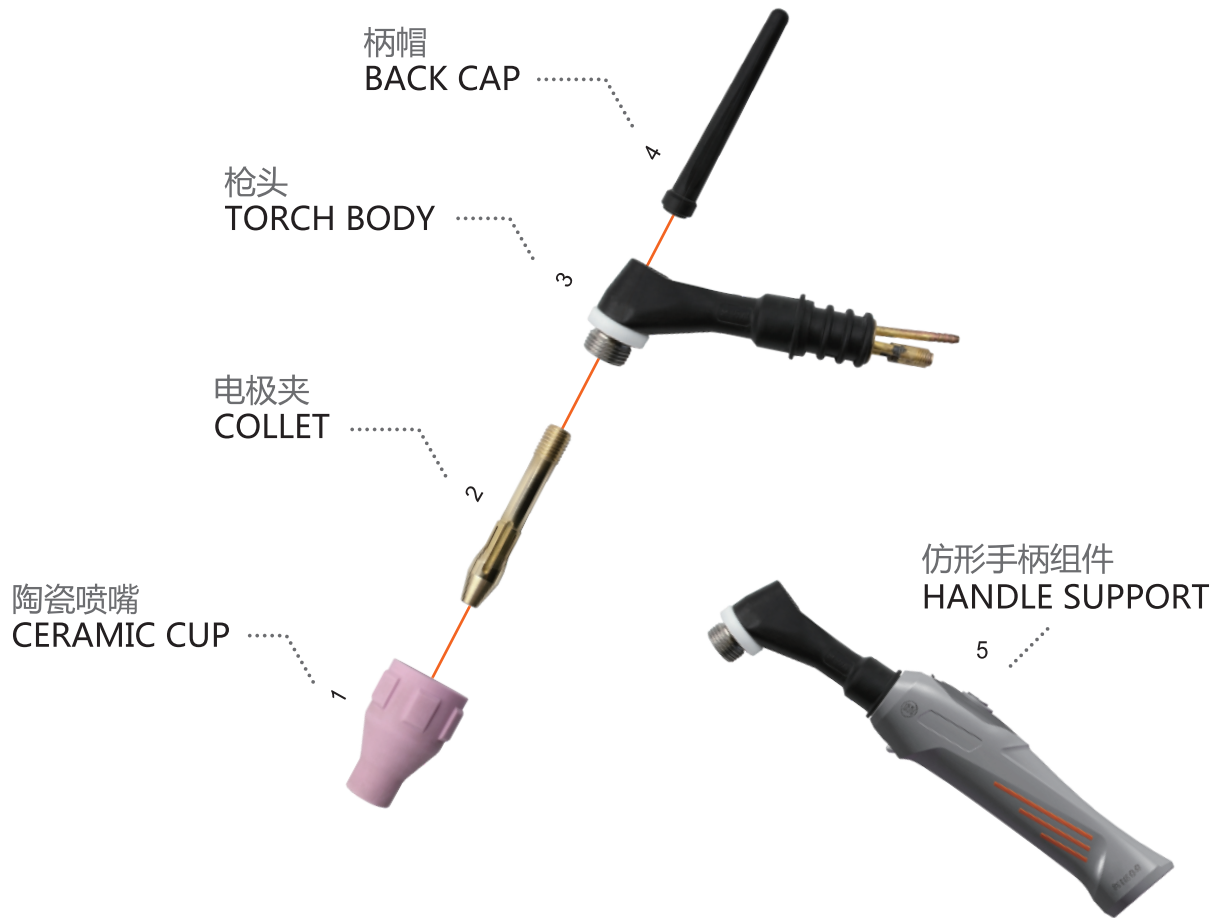

配件订购编号
Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)


Position	Code	Ref.	Description
● 1.1	MGS0702	GR6	Φ9.5mm
1.2	MGS0701	GR8	Φ16mm
1.3	MGS0703	GR10	Φ12.5mm
1.4	MGS0704	GR12	Φ19.5mm
● 2.1	MGU0607-16	775.0062	Φ1.6mm
2.2	MGU0607-24	775.0063	Φ2.4mm
2.3	MGU0607-32	775.0064	Φ3.2mm
2.4	MGU0607-48	775.0066	Φ4.8mm
● 3	MGI0563		
● 4.1	MHJ0611		
4.2	MHJ0612		
● 5	AGI0563-00		



 水冷 WATER COOLED
 直流35%暂载率 Duty35%DC:500 Amp
 交流35%暂载率 Duty35%AC:350 Amp
 电极尺寸Electrode Size:1.6-4.0 WIRE

整枪订购编号 Procurement code

IPZ6906	4M	SINGLE/单开关 M12x1
IPZ6306	8M	AIR TUBE/气管 1/4G
		WATER INLET/进水管 3/8G

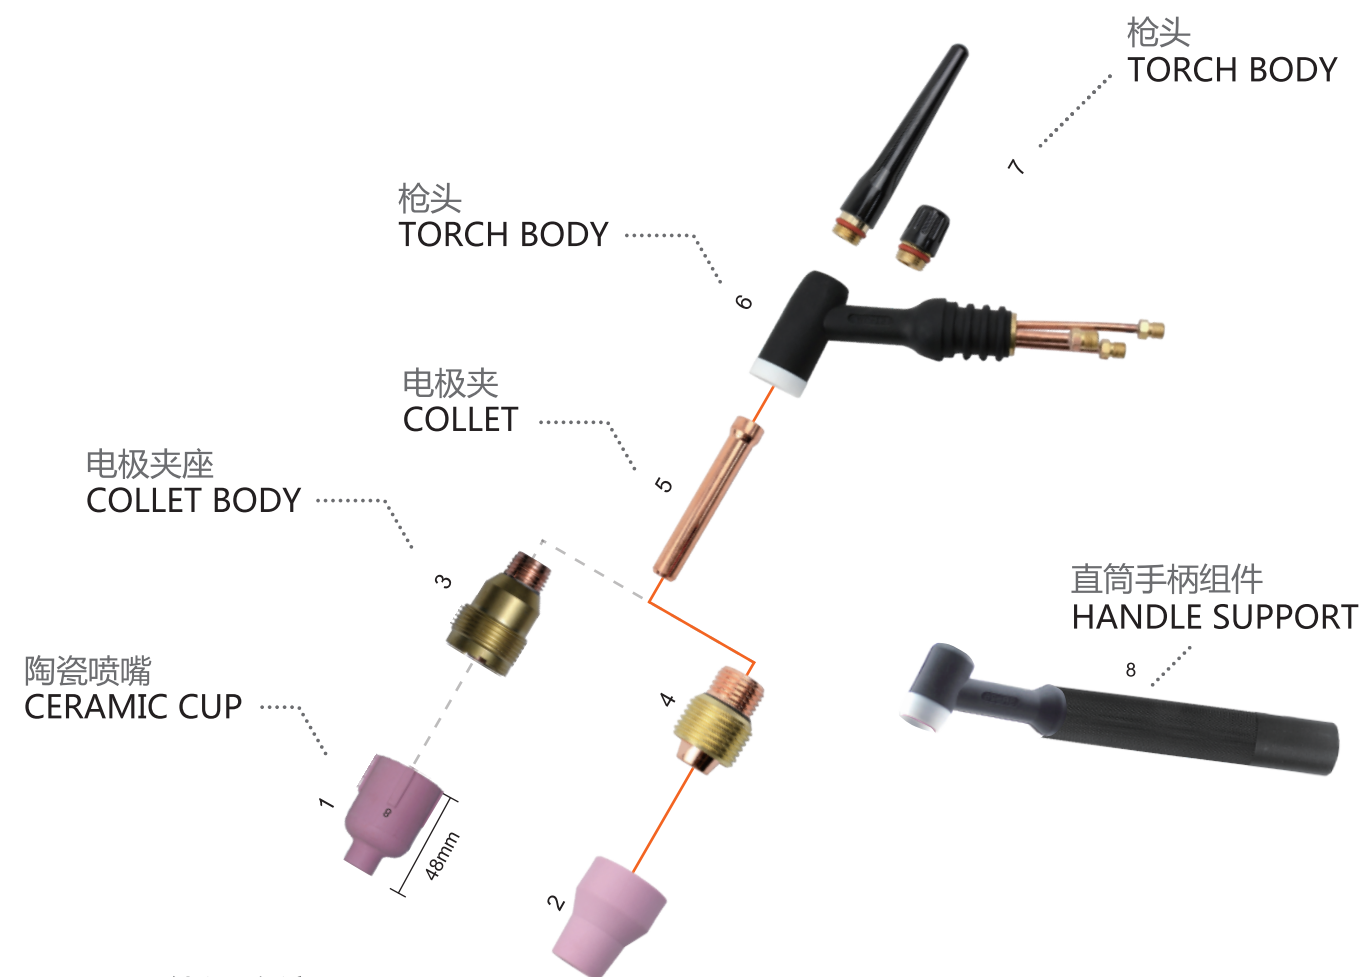

配件订购编号 Consumables procurement code

(带“●”为标准配置 / With“●”is the standard configuration)

Position	Code	Ref.	Description	Position	Code	Ref.	Description
1.1	MGS0020	57N75	GR6 Φ9.5mm	3.1	MGF0066-16	11GL16	Φ1.6mm
1.2	MGS0026	57N74	GR8 Φ12.5mm	3.2	MGF0066-24	11GL32	Φ2.4mm
1.3	MGS0027	53N88	GR10 Φ16mm	3.3	MGF0066-32	11GL18	Φ3.2mm
1.4	MGS0028	53N87	GR12 Φ19.5mm	3.4	MGF0066-40	11GL53	Φ4.0mm
1.5	MGS0029	53N89	GR15 Φ24mm	3.5	MGF0066-48	11GL36	Φ4.8mm
● 2.1	MGS0681	14N61-10	GR10 Φ16mm	● 4	MGF0067	11WP65	
2.2	MGS0682	14N61-12	GR12 Φ19.5mm	● 5.1	MGU0066-16	85Z14	Φ1.6mm
2.3	MGS0683	14N68	GR10 Φ6.5mm	5.2	MGU0066-24	85Z15	Φ2.4mm
2.4	MGS0684	14N69	GR12 Φ8mm	5.3	MGU0066-32	85Z16	Φ3.2mm
2.5	MGS0685	14N61	GR8 Φ12.5mm	5.4	MGU0066-40	85Z17	Φ4.0mm
2.6	MGS0686	14N57	GR4 Φ6.5mm	5.5	MGU0066-48	85Z18	Φ4.8mm
2.7	MGS0687	14N58	GR5 Φ8mm	● 6	MGI0970	WP-12	
2.8	MGS0688	14N59	GR6 Φ9.5mm	7.1	MHJ0678	Long	
2.9	MGS0689	14N60	GR7 Φ11mm	● 7.3	MHJ0679	Short	
2.10	MGS0690	14N70	GR4 Φ9.5mm	● 8	IGV0003	85WP13	
2.11	MGS0696	14N71	GR4 Φ11mm				
2.12	MGS0697	14N72	GR4 Φ12.5mm				


 $\alpha=70^\circ$


 $\alpha=90^\circ$



Technical data

Cooling: Gas Cooled
Duty35%DC: 150AMP
Duty35%AC: 110AMP
Electrode Size: 1.0~3.2mm

技术参数
冷却方式: 气冷
直流35%暂载率: 150AMP
交流35%暂载率: 110AMP
电极尺寸: 1.0~3.2mm

Code	Length	Description
AOZ6124-102	4M	Torch sintig TSA17 4m M12×1 焊枪/单开关/TSA17/ 4m /M12×1
AOZ6128-102	8M	Torch sintig TSA17 8m M12×1 焊枪/单开关/TSA17/ 8m /M12×1


 $\alpha=70^\circ$


 $\alpha=90^\circ$



Technical data

Cooling: Water Cooled
Duty35%DC: 225AMP
Duty35%AC: 160AMP
Electrode Size: 0.5~3.2mm

技术参数
冷却方式: 水冷
直流35%暂载率: 225AMP
交流35%暂载率: 160AMP
电极尺寸: 0.5~3.2mm

Code	Length	Description
AOM6124-504	4M	Torch sintig TSA20 4m M12×1 焊枪/单开关/TSA20/ 4m /M12×1
AOM6128-504	8M	Torch sintig TSA20 8m M12×1 焊枪/单开关/TSA20/ 8m /M12×1


 $\alpha=70^\circ$


 $\alpha=90^\circ$



Technical data

Cooling: Gas Cooled
Duty35%DC: 200AMP
Duty35%AC: 140AMP
Electrode Size: 1.0~4.0mm

技术参数
冷却方式: 气冷
直流35%暂载率: 200AMP
交流35%暂载率: 140AMP
电极尺寸: 1.0~4.0mm

Code	Length	Description
AOM6124-102	4M	Torch sintig TSA26 4m M12×1 焊枪/单开关/TSA26/ 4m /M12×1
AOM6128-102	8M	Torch sintig TSA26 8m M12×1 焊枪/单开关/TSA26/ 8m /M12×1



TIG9

AOT1394-608 TIG9 4M
AOT1398-608 TIG9 8M

冷却方式: 气冷
直流35%暂载率: 120AMP
交流35%暂载率: 85AMP
电极尺寸: 0.5~1.6mm

Cooling: Air-Cooled
Duty35%DC: 120AMP
Duty35%AC: 85AMP
Electrode Size:0.5~1.6mm

TIG17

AOZ1394-608 TIG17 4M
AOZ1398-608 TIG17 8M

冷却方式: 气冷
直流35%暂载率: 140AMP
交流35%暂载率: 125AMP
电极尺寸: 1.0~3.2mm

Cooling: Air-Cooled
Duty35%DC: 140AMP
Duty35%AC: 125AMP
Electrode Size:1.0~3.2mm

TIG18

AOB1394-308 TIG18 4M
AOB1398-308 TIG18 8M

冷却方式: 水冷
直流100%暂载率: 320AMP
交流100%暂载率: 240AMP
电极尺寸: 1.0~3.2mm

Cooling: Water-Cooled
Duty100%DC: 320AMP
Duty100%AC: 240AMP
Electrode Size:1.0~3.2mm

TIG20

AOM1394-308 TIG20 4M
AOM1398-308 TIG20 8M

冷却方式: 水冷
直流100%暂载率: 250AMP
交流100%暂载率: 220AMP
电极尺寸: 1.0~3.2mm

Cooling: Water-Cooled
Duty100%DC: 250AMP
Duty100%AC: 220AMP
Electrode Size:1.0~3.2mm

TIG26

AOW1394-608 TIG26 4M
AOW1398-608 TIG26 8M

冷却方式: 气冷
直流35%暂载率: 180AMP
交流35%暂载率: 150AMP
电极尺寸: 1.0~3.2mm

Cooling: Air-Cooled
Duty35%DC: 180AMP
Duty35%AC: 150AMP
Electrode Size:1.0~3.2mm

氩弧/镭射冷送丝机

TIG COLD WIRE LASER WIRE FEEDER

- 自动送丝管直接从焊枪内部导出, 狭窄工况无阻碍作业。
Automatic wire-feeder system, available for multiple application especially especially useful for deep-corner welding.
- 送丝速度最大7米/分钟, 焊接效率增加200%。
Wire-feeding speed of up to 7 meter per minute, a 200% increase in efficiency.
- 送丝速度精度0.1米/分钟, 送丝盘容量15公斤。
Margin of error of only up to 0.1 meters per minute, spool capacity of 15 kilograms.
- 带有延时送丝功能, 可脉动送丝。
Equipped with delayed start and pulsation functions.
- 可用于不锈钢、铝、碳钢焊接, 焊丝直径0.8-1.6毫米。
Can be used with stainless steel, aluminium and standard steel wire with a diameter from 0.8 to 1.6mm.
- TIGO100适用于手工氩弧焊、自动氩弧焊。
Used for manual and automatic TIG welding.



TIGO100

氩弧/镭射冷送丝机

TIG COLD WIRE LASER WIRE FEEDER

- 自动送丝管直接从焊枪内部导出, 狭窄工况无阻碍作业。
Automatic wire-feeder system, available for multiple application especially especially useful for deep-corner welding.
- 送丝速度最大7米/分钟, 焊接效率增加200%。
Wire-feeding speed of up to 7 meter per minute, a 200% increase in efficiency.
- 送丝速度精度0.1米/分钟, 送丝盘容量15公斤。
Margin of error of only up to 0.1 meters per minute, spool capacity of 15 kilograms.
- 带有延时送丝功能, 可脉动送丝。
Equipped with delayed start and pulsation functions.
- 可用于不锈钢、铝、碳钢焊接, 焊丝直径0.8-1.6毫米。
Can be used with stainless steel, aluminium and standard steel wire with a diameter from 0.8 to 1.6mm.
- TIGO200适用于手工氩弧焊、自动氩弧焊以及激光焊接。
Used for manual and automatic TIG welding, and laser welding.



TIGO200




- L 枪颈长度Torch head length: 80mm/140mm/300mm
- 冷却方式Cooling: 气冷/水冷 Air/Water-Cooled
- DC 35% 直流35%暂载率 Duty35%DC:50 Amp (气冷Air-Cooled)
- DC 100% 直流100%暂载率 Duty100%DC:125 Amp (水冷Water-Cooled)
- mm 电极尺寸Electrode Size:1.0-2.4 WIRE

整枪订购编号 Procurement code

AOU1124	4M	M12*1/L=80mm
AOU1128	8M	M12*1/L=80mm
AOU1124-01	4M	M12*1/L=140mm
AOU1128-01	8M	M12*1/L=140mm
AOU1124-02	4M	M12*1/L=300mm
AOU1128-02	8M	M12*1/L=300mm

配件订购编号 Consumables procurement code



通用快速转换器 UNIVERSAL QUICK CONVERTOR

- 氩弧焊枪通用快速转换器:适用于各种焊机。
- TIG torch universal quick converter:suitable for adapting different.
- 具有独特焊枪的焊机。(专利申请中)
- Generators with unique torch. (PATENT PENDING)



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ13快插 5芯航插	- Φ6 Quick connector - Φ13 Cable coupler 5-core Switch plug
	- 蓝:B - 棕:不接 - 灰:A - 桥接 C-D

适用于TIG焊机制造商“artec” / Applicable to TIG manufacturers of current source “artec”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ13快插 5芯航插	- Φ6 Quick connector - Φ13 Cable coupler 5-core Switch plug
	- 蓝:A - 棕:C - 灰:B

适用于TIG焊机制造商“artec” / Applicable to TIG manufacturers of current source “artec”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ6水速通接头 5芯航插 - Φ6水速通接头 - Φ13快插	- Φ6 Quick connector - Φ6 Quick connector 5-core Switch plug - Φ6 Quick connector - Φ13 Cable coupler
- 蓝:B - 棕:不接 - 灰:A	- Blue: B - Brown: isolate - Gray: A
桥接 D-E	Bridge D-E


• 适用于TIG焊机制造商“artec” / Applicable to TIG manufacturers of current source “artec”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ6水速通接头 5芯航插 - Φ6水速通接头 - Φ13快插	- Φ6 Quick connector - Φ6 Quick connector 5-core Switch plug - Φ6 Quick connector - Φ13 Cable coupler
- 蓝:A - 棕:C - 灰:B	- Blue: A - Brown: C - Gray: B

• 适用于TIG焊机制造商“artec” / Applicable to TIG manufacturers of current source “artec”

UI

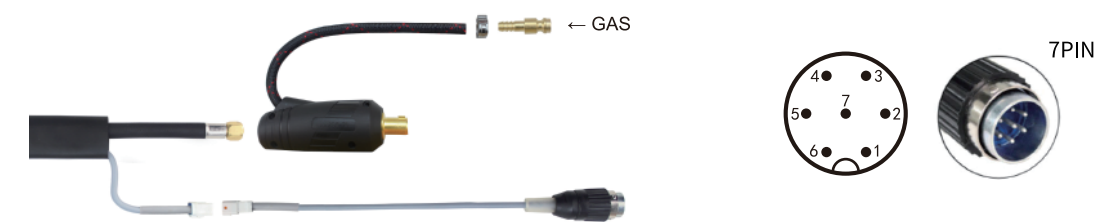

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ13快插 7芯航插	- Φ6 Quick connector - Φ13 Cable coupler 7-core Switch plug
- 蓝:1 - 灰:2 - 黑:3 - 棕:6 - 红:5	- Blue: 1 - Gray: 2 - Black: 3 - Brown: 6 - Red: 5

• 适用于TIG焊机制造商“castolin” Up/Down” / Applicable to TIG manufacturers of current source “castolin” Up/Down”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - Φ6水速通接头 7芯航插 - Φ6水速通接头 - Φ13快插	- Φ6 Quick connector - Φ6 Quick connector 7-core Switch plug - Φ6 Quick connector - Φ13 Cable coupler
- 蓝:1 - 灰:2 - 黑:3 - 棕:6 - 红:5	- Blue: 1 - Gray: 2 - Black: 3 - Brown: 6 - Red: 5

• 适用于TIG焊机制造商“castolin” Up/Down” / Applicable to TIG manufacturers of current source “castolin” Up/Down”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- G3/8 - Φ13快插 7芯航插	- G3/8 - Φ13 Cable coupler 7-core Switch plug
- 蓝:1 - 棕:3 - 灰:2	- Blue: 1 - Brown: 3 - Gray: 2

• 适用于TIG焊机制造商“cloos” / Applicable to TIG manufacturers of current source “cloos”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - G3/8 - 芯航插 - Φ6水速通接头 - Φ13快插	- Φ6 Quick connector - G3/8 5-core Switch plug - Φ6 Quick connector - Φ13 Cable coupler
- 蓝:1 - 棕:3 - 灰:2	- Blue: 1 - Brown: 3 - Gray: 2

• 适用于TIG焊机制造商“cloos” / Applicable to TIG manufacturers of current source “cloos”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- G1/8 3芯航插	- G1 / 8 3-core Switch plug
- 蓝:3 - 棕:不接 - 灰:2 - 桥接 1-3	- Blue: 3 - Brown: isolate - Gray: 2 - Bridge 1-3

• 适用于TIG焊机制造商“Daelx” / Applicable to TIG manufacturers of current source “Daelx”




接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- G3/8 - G1/4 3芯航插 - M12*1	- G3 / 8 - G1 / 4 3-core Switch plug - M12 * 1
- 蓝:2 - 棕:不接 - 灰:1	- Blue: 2 - Brown: isolate - Gray: 1

• 适用于TIG焊机制造商“Daelx” / Applicable to TIG manufacturers of current source “Daelx”




接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- G1/4 - Φ9快插 5芯航插	- G1 / 4 - Φ9 Cable coupler 5-core Switch plug
- 蓝:B - 棕:不接 - 灰:A	- Blue: B - Brown: isolate - Gray: A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”

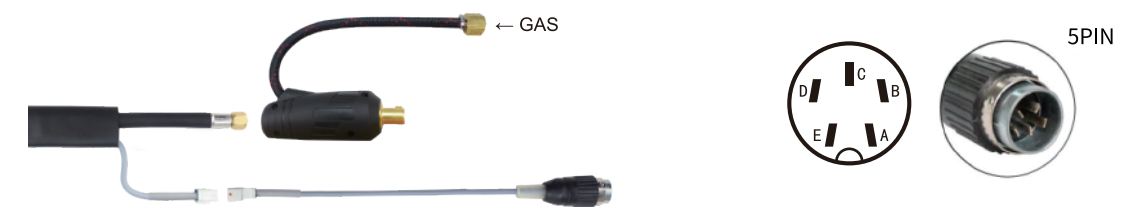


接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- G1/4 - Φ13快插 5芯航插	- G1 / 4 - Φ13 Cable coupler 5-core Switch plug
- 蓝:B - 棕:不接 - 灰:A	- Blue: B - Brown: isolate - Gray: A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”

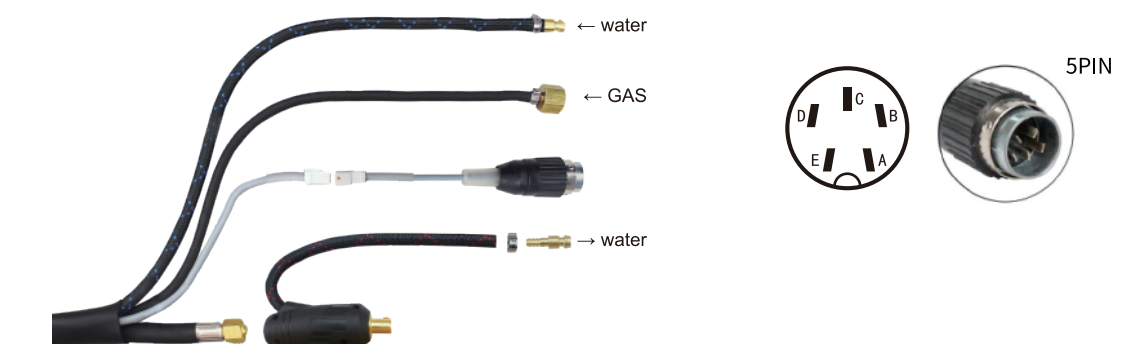


接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
- Φ6水速通接头 - G1/4 5芯航插 - Φ6水速通接头 - Φ13快插	- Φ6 Quick connector - G1/4 5-core Switch plug - Φ6 Quick connector - Φ13 Cable coupler
- 蓝:B - 棕:不接 - 灰:A	- Blue: B - Brown: isolate - Gray: A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”

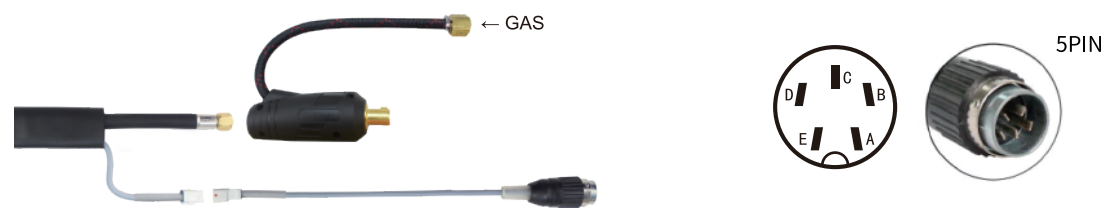

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • Φ9快插 • 5芯航插	• 蓝:B • 棕:不接 • 灰:A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”

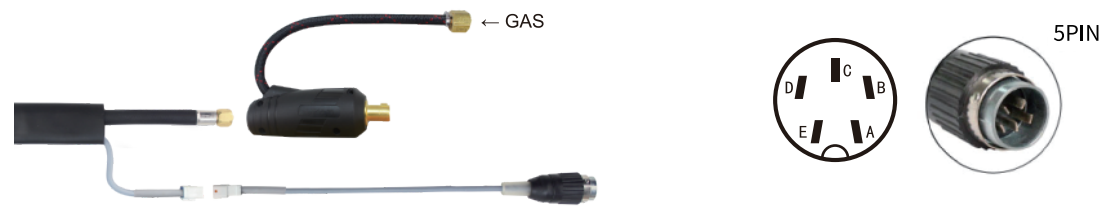

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • Φ13快插 • 5芯航插	• 蓝:B • 棕:不接 • 灰:A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• Φ6水速通接头 • G1/4 • 5芯航插 • Φ6水速通接头 • Φ13快插	• 蓝:B • 棕:不接 • 灰:A

• 适用于TIG焊机制造商“d+l” / Applicable to TIG manufacturers of current source “d+l”




接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • Φ13快插 • 5芯航插	• 蓝:B • 棕:不接 • 灰:A

• 适用于TIG焊机制造商“ess” / Applicable to TIG manufacturers of current source “ess”




接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • 5芯航插	• 蓝:A • 棕:C • 灰:B

• 适用于TIG焊机制造商“ess” / Applicable to TIG manufacturers of current source “ess”

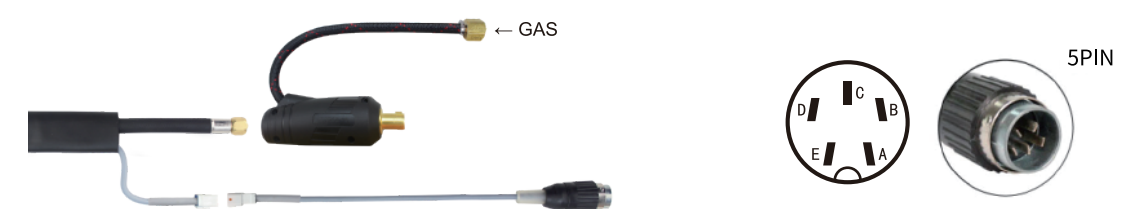


接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • Φ13快插 • 5芯航插	• 蓝:A • 棕:C • 灰:B

• 适用于TIG焊机制造商“ess” / Applicable to TIG manufacturers of current source “ess”

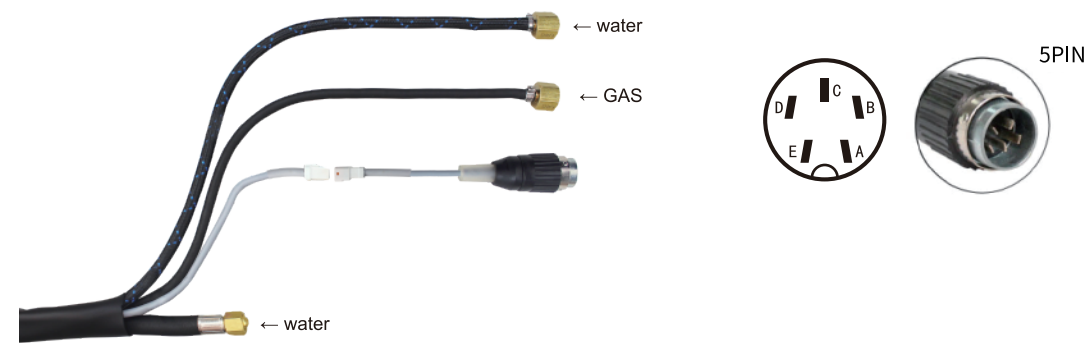


接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G3/8 • G1/4 • 5芯航插 • M12*1	• 蓝:B • 棕:不接 • 灰:A • 桥接 D-E

• 适用于TIG焊机制造商“ess” / Applicable to TIG manufacturers of current source “ess”

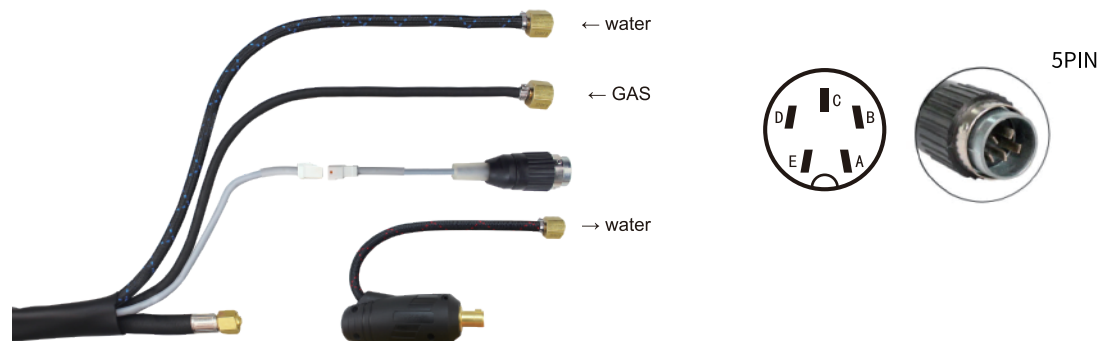


接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G3/8 • G1/4 • 5芯航插 • M12*1 • Φ13快插	• 蓝:B • 棕:不接 • 灰:A • 桥接 D-E

• 适用于TIG焊机制造商“ess” / Applicable to TIG manufacturers of current source “ess”

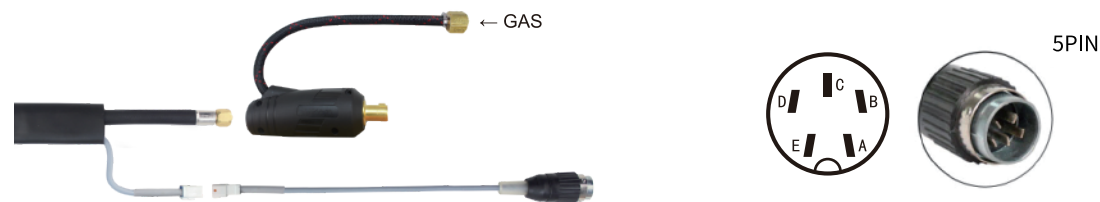

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G1/4 • Φ13快插 • 5芯航插	• 蓝:B • 棕:C • 灰:A

• 适用于TIG焊机制造商“ewm” / Applicable to TIG manufacturers of current source “ewm”

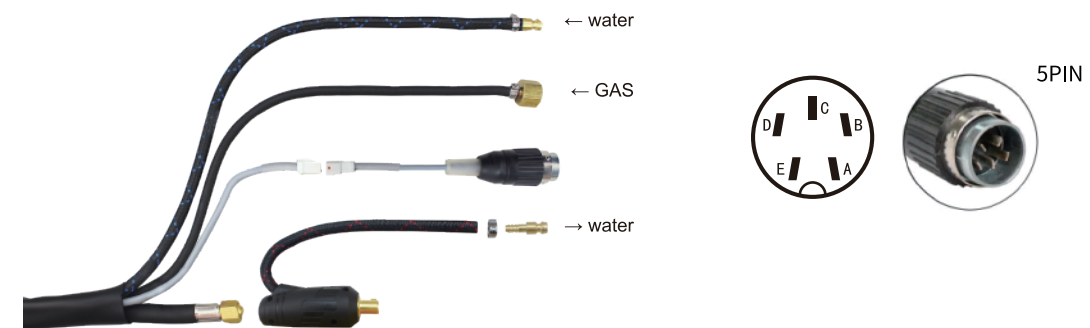

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• Φ6水速通接头 • G1/4 • 5芯航插 • Φ6水速通接头 • Φ13快插	• 蓝:B • 棕:C • 灰:A

• 适用于TIG焊机制造商“ewm” / Applicable to TIG manufacturers of current source “ewm”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G3/8 • 9芯扁航插	• 蓝:2+3 • 棕:4+5 • 灰:8+9

• 适用于TIG焊机制造商“fronius” / Applicable to TIG manufacturers of current source “fronius”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING
• G3/8 • 9芯扁航插	• 蓝:5 • 灰:3 • 黑:9 • 棕:4 • 红:2

• 适用于TIG焊机制造商“fronius” Up/Down
Applicable to TIG manufacturers of current source “fronius” Up/Down



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING						
• G3/8 • G3/8 • 9芯扁航插 • G3/8	• G3/8 • G3/8 • 9 core flat plug • G3/8						
	<table> <tr> <td>蓝:2+3</td><td>Blue: 2 + 3</td></tr> <tr> <td>棕:4+5</td><td>Brown: 4 + 5</td></tr> <tr> <td>灰:8+9</td><td>Gray: 8 + 9</td></tr> </table>	蓝:2+3	Blue: 2 + 3	棕:4+5	Brown: 4 + 5	灰:8+9	Gray: 8 + 9
蓝:2+3	Blue: 2 + 3						
棕:4+5	Brown: 4 + 5						
灰:8+9	Gray: 8 + 9						

• 适用于TIG焊机制造商“fronius®” / Applicable to TIG manufacturers of current source “fronius®”




接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING						
• G1/4 • 5芯航插	• G1 / 4 • 5-core Switch plug						
	<table> <tr> <td>蓝:A</td><td>Blue: A</td></tr> <tr> <td>棕:C</td><td>Brown: C</td></tr> <tr> <td>灰:B</td><td>Gray: B</td></tr> </table>	蓝:A	Blue: A	棕:C	Brown: C	灰:B	Gray: B
蓝:A	Blue: A						
棕:C	Brown: C						
灰:B	Gray: B						

• 适用于TIG焊机制造商“jockle®” / Applicable to TIG manufacturers of current source “jockle®”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING						
• Φ6水速通接头 • Φ13快插 • 5芯航插	• Φ6 Quick connector • Φ13 Cable coupler • 5-core Switch plug						
	<table> <tr> <td>蓝:A</td><td>Blue: A</td></tr> <tr> <td>棕:C</td><td>Brown: C</td></tr> <tr> <td>灰:B</td><td>Gray: B</td></tr> </table>	蓝:A	Blue: A	棕:C	Brown: C	灰:B	Gray: B
蓝:A	Blue: A						
棕:C	Brown: C						
灰:B	Gray: B						

• 适用于TIG焊机制造商“jockle®” / Applicable to TIG manufacturers of current source “jockle®”

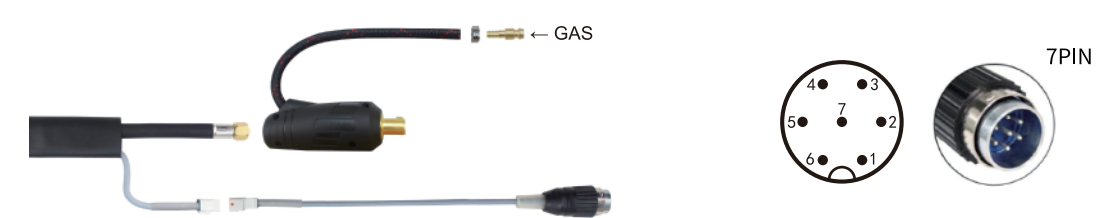

接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING										
• Φ6水速通接头 • Φ13快插 • 7芯航插	• Φ6 Quick connector • Φ13 Cable coupler • 7-core Switch plug										
	<table> <tr> <td>蓝:1</td><td>Blue: 1</td></tr> <tr> <td>灰:2</td><td>Gray: 2</td></tr> <tr> <td>黑:5</td><td>Black: 5</td></tr> <tr> <td>棕:4</td><td>Brown: 4</td></tr> <tr> <td>红:3</td><td>Red: 3</td></tr> </table>	蓝:1	Blue: 1	灰:2	Gray: 2	黑:5	Black: 5	棕:4	Brown: 4	红:3	Red: 3
蓝:1	Blue: 1										
灰:2	Gray: 2										
黑:5	Black: 5										
棕:4	Brown: 4										
红:3	Red: 3										

• 适用于TIG焊机制造商“jockle®” / Applicable to TIG manufacturers of current source “jockle®”



接头 / CONNECTOR	航插接线 / SWITCH PLUG WIRING								
• Φ6水速通接头 • G1/4 • 5芯航插 • Φ6水速通接头 • Φ13快插	• Φ6 Quick connector • G1 / 4 • 5-core Switch plug • Φ6 Quick connector • Φ13 Cable coupler								
	<table> <tr> <td>蓝:A</td><td>Blue: A</td></tr> <tr> <td>棕:C</td><td>Brown: C</td></tr> <tr> <td>灰:B</td><td>Gray: B</td></tr> <tr> <td>桥接 D-E</td><td>Bridge D-E</td></tr> </table>	蓝:A	Blue: A	棕:C	Brown: C	灰:B	Gray: B	桥接 D-E	Bridge D-E
蓝:A	Blue: A								
棕:C	Brown: C								
灰:B	Gray: B								
桥接 D-E	Bridge D-E								

• 适用于TIG焊机制造商“jockle®” / Applicable to TIG manufacturers of current source “jockle®”